

### 3. SYSTEM OVERVIEW and INTEGRATION -- HARDWARE

Jim Jackson, Steven Durand  
Last changed- March 29, 2006

---

#### Revision History:

**2001-Mar 01:** Initial release under configuration control

**2001-May 09:** Updated text based on latest block diagrams; updated digitizer specifications

**2002-May 29:** Updated text based on latest Bins & Module designs, updated gain and phase specs

**2004-June 30:** Updated the Acceptance Test Plan and the module descriptions

**2004-Nov 01:** Updated the digitizer and synthesizer specifications, and the module list

**2004-Nov 29:** Added an introduction

**2004-Dec 06:** Removed computing sections and corrected FE section

**2006-Mar 29:** Added Figure 3.5, Microwave Synthesizers Configuration and text

---

#### Summary

This chapter presents a summary of the performance, engineering, and test specifications for the EVLA project. The goal of the EVLA project is to increase the overall system bandwidth by a factor of 80 and to increase the sensitivity and spatial resolution of the present VLA. The EVLA project will require new feeds, receivers, synthesizers, reference generators, down/up converters, samplers, and a fiber optic system.

#### **3.1 Introduction**

The principal subsystems are listed in Figure 3-1. Each of the brown EVLA project blocks will be discussed in more detail in the following text.

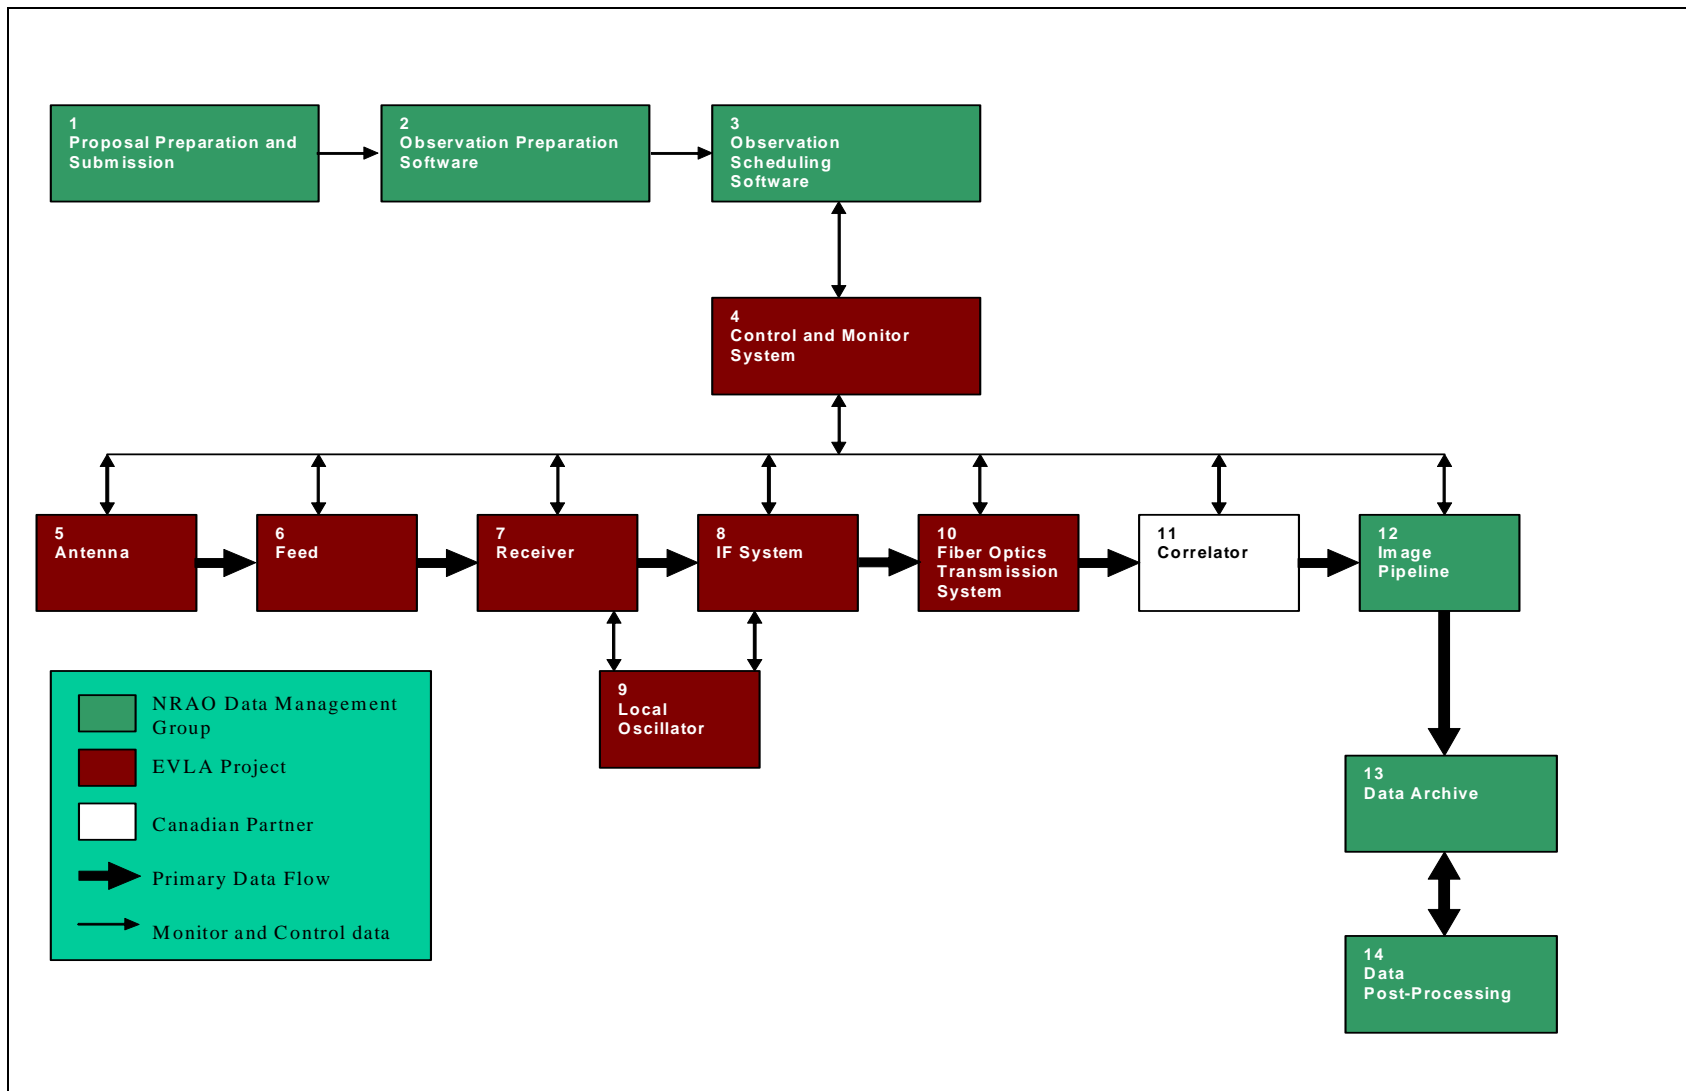


Figure 3.1 Principal EVLA Subsystems

### 3.1.1 Antennas

The EVLA reuses the existing 28 E-Systems 25-meter parabolic antennas that make up the current VLA. Modifications are made as necessary to support the new feeds, front ends, electronics and fiber optics systems. The present ACU and drive system will be reused.

### 3.1.2 Feeds

The continuous frequency coverage, required by the project, will be obtained by subdividing the 50 GHz range into eight discrete bands. The following factors were considered when selecting the bandwidths for each band: (1) available technology, (2) the number of receivers/feeds, and (3) performance of the receiver/feed/antenna at the band edges. These bands are identified in Table 3.1 along with the proposed bandwidth per band and bandwidth ratio.

**Table 3.1 - Frequency Coverage and Bandwidth**

Band Designation	EVLA Frequency Range (GHz)	EVLA Bandwidth Ratio
L	1.0 – 2.0	2.0
S	2.0 – 4.0	2.0
C	4.0 – 8.0	2.0
X	8.0 – 12.0	1.5
Ku	12.0 – 18.0	1.5
K	18.0 – 26.5	1.5
Ka	26.5 – 40.0	1.5
Q	40.0 – 50.0	1.25

The existing K and Q band feeds can be used for EVLA without modification. Both existing feeds were designed and tested for operation over the EVLA range.

### 3.1.3 Receivers

The EVLA plan to provide continuous frequency coverage from 1 to 50 GHz requires that new low noise receiving systems be installed that provide adjacent frequency ranges. The VLA currently supports six cryogenic receivers with gaps in coverage between existing bands. Continuous frequency coverage will be achieved by adding two new receivers (S-Band and Ka-Band) and by expanding the frequency range of the others. Figure 3.2 shows the basic receiver configuration.

The input required by the T303 U/X down converters is 8-18 GHz. The existing Q-Band and K-Band receivers will require a modification to block convert the entire RF band down to 8-18 GHz. The new Ka-Band and old Ku-Band receivers and feeds will be designed to meet the 8-18 GHz requirements directly. The output of the T303 is 8-12 GHz.

The X-Band receiver which presently outputs an 8-8.8 GHz signal that is already within the 8-12 GHz input band required by the T304 down converters. The X-Band receiver will be re-designed to provide the full 8-12 GHz frequency coverage latter in the project.

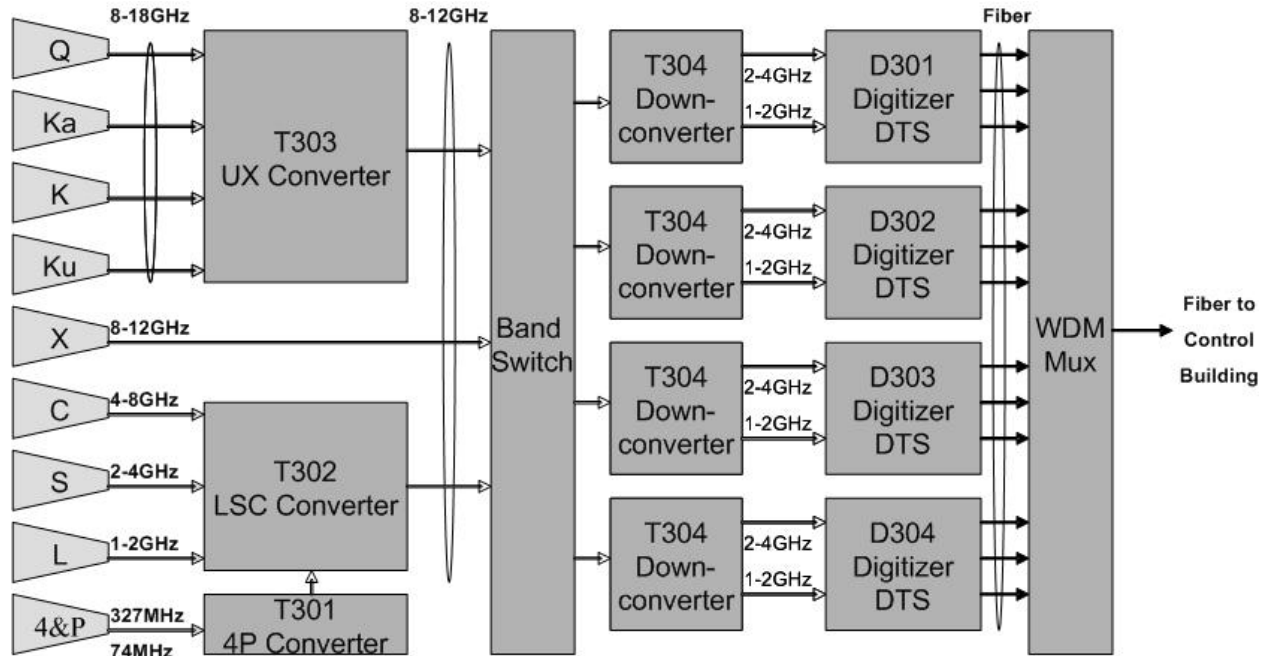


Figure 3.2 Receiver Configuration

The C-Band, S-Band and L-Band receivers and feeds are new designs. These three bands are up converted by the T302 to be in the 8-12 GHz range. The 4-Band and P-Band signals will be up converted twice, once by the T301 to be within the 1-2GHz window for input to the T302 and once by the T302, to produce a signal that is within the 8-12 GHz range.

### 3.1.4 Local Oscillator

From the primary reference (maser), the central EVLA LO system generates all of the local oscillator signals needed by the central EVLA racks and the correlator, Figure 3.3. These references are generated by either direct multiplication, direct division, or by phase locked synthesizers. The reference 5 MHz supplied by the hydrogen maser is used to lock a 128 MHz synthesizer. This synthesizer's (L350) output is then directly multiplied to 512 MHz, which is used as the antennas' primary reference. The 128 MHz is divided down to 5.12 MHz, 19.2 Hz, 128 Hz, and 0.1 Hz. The 5.12 MHz is the digital clock used by the round trip phase system. The 128 Hz is the beat frequency used by the round trip phase system. The 19.2 Hz is the heart beat timing signal used for maintaining communications and for noise calibration timing. The 0.1 Hz signal is the reset signal that is sent to align the phase of the antenna reference signals.

The antenna LO system receives the reference 512 MHz over the fiber. This reference also contains a reset signal that is recovered and used to reset the antenna timing. A portion of the optical 512 MHz is returned to the central system through an optical splitter. The returned 512 MHz is mixed with a 512000128 Hz signal produce a 128 Hz signal that is representative of the change in round trip phase. This change in phase is used by the round trip phase measurement system to determine changes in fiber path length due to temperature. The frequency of 512 MHz was selected to provide a robust round trip phase measurement system with a resolution of +/-1.0ps.

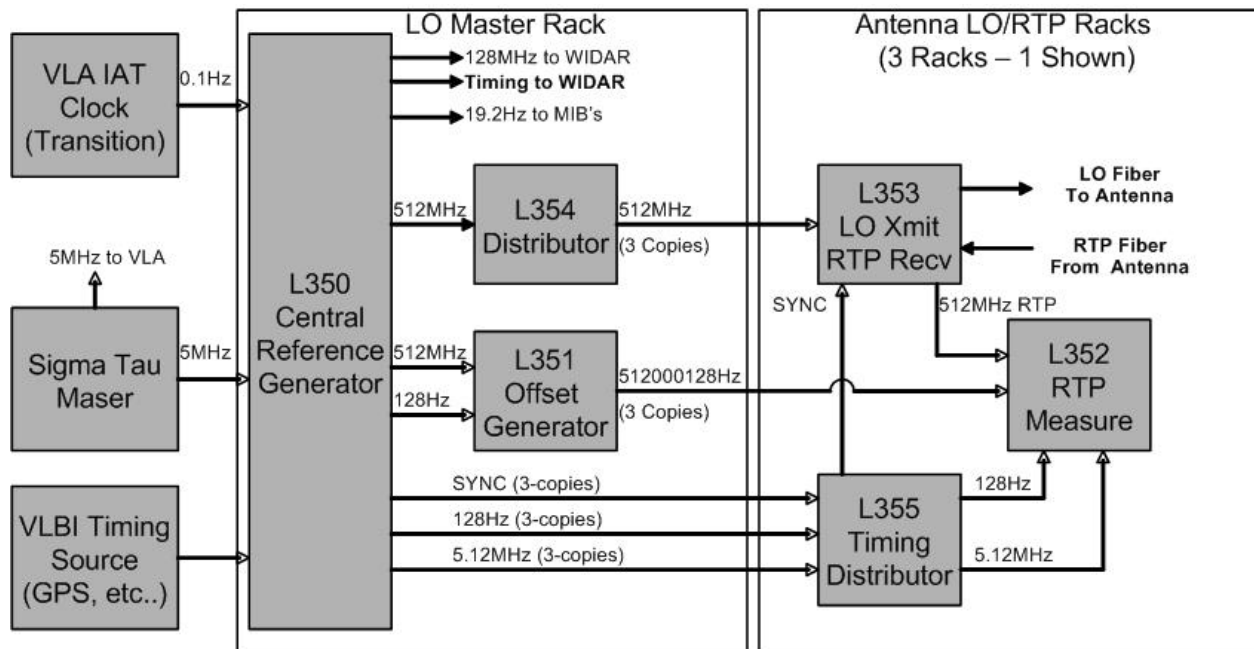


Figure 3.3 Central EVLA LO System

The antenna LO system is based on a quality 128 MHz voltage controlled crystal oscillator located in the L305 Antenna Reference Generator. The frequency of 128 MHz was selected to provide adequate synthesizer resolution. The L305 module phase locks the 128 MHz reference to the 512 MHz provided by the L304 via the fiber system, (Figure 3.4). The 128 MHz is multiplied up to 1024 MHz, 2048 MHz, and 4096 MHz. These signals are used by the LO synthesizers, the IF converter modules and the data transmission system. Because of this down-up conversion of the reference there can be a timing ambiguity in the antennas. This ambiguity is resolved by using the reset signal to align antenna phase. The 128 MHz is also divided down in an FPGA to 19.2 Hz and 9.6 Hz to provide timing for the module interface boards and the cal switching, respectively. The 512 MHz and the 128 MHz references are used by microwave comb generators in the L300 module. The 128 MHz comb is amplified and provided to the four L302 10.8-14.8 GHz synthesizers. The 512 MHz comb is amplified and provided to the two L301 12-20 GHz synthesizers. These synthesizer outputs are used by the base band converter modules and the front ends.

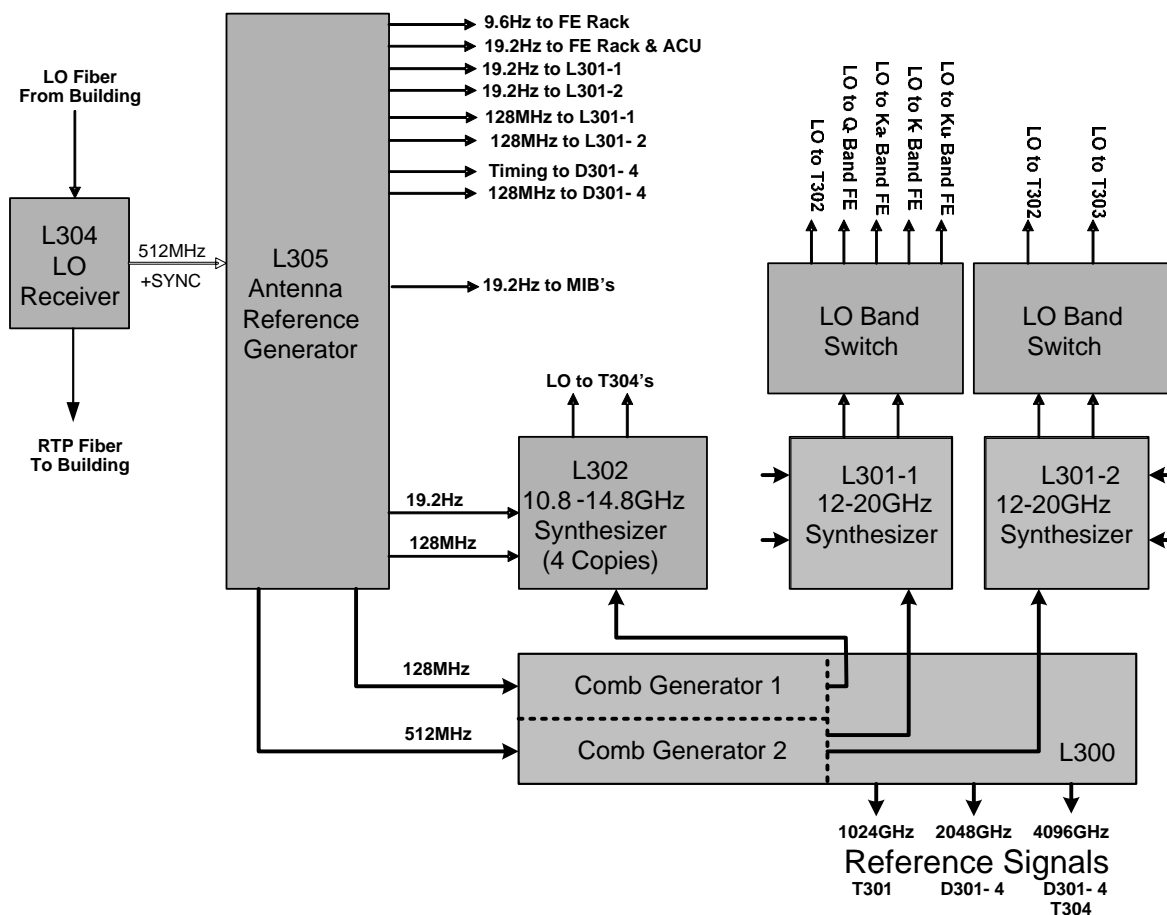


Figure 3.4 Microwave Synthesizers Configuration

### 3.1.5 IF Systems

In each EVLA antenna there are seven converter modules (four different designs), Figure 3.5. The T301 and T302 up convert the receiver signals and the T303 and the four T304/305s down convert the signals. The high frequency front ends, (Q, Ka, K, Ku Bands) produce an output within 8-18 GHz. Each of these IF's is then switched into the UX converter module where the signals are converted to 8-12 GHz. The X-Band signal is fed straight through to the band switches. The X-Band signal is fed straight through to the band switches.

The lower frequency front end signals are up-converted. The 74 MHz and P-Band front ends are up-converted to between 1-2GHz by the 4P converter. The L-band, S-band, C-Band, and converted 4 and P bands are up-converted to 8-12 GHz by the T302 LSC converter. Only one receiver/converter can be selected by the band switches at a time. The base band converter converts the selected IFs to either 1-2 GHz or 2-4 GHz base bands depending on which samplers will be used.

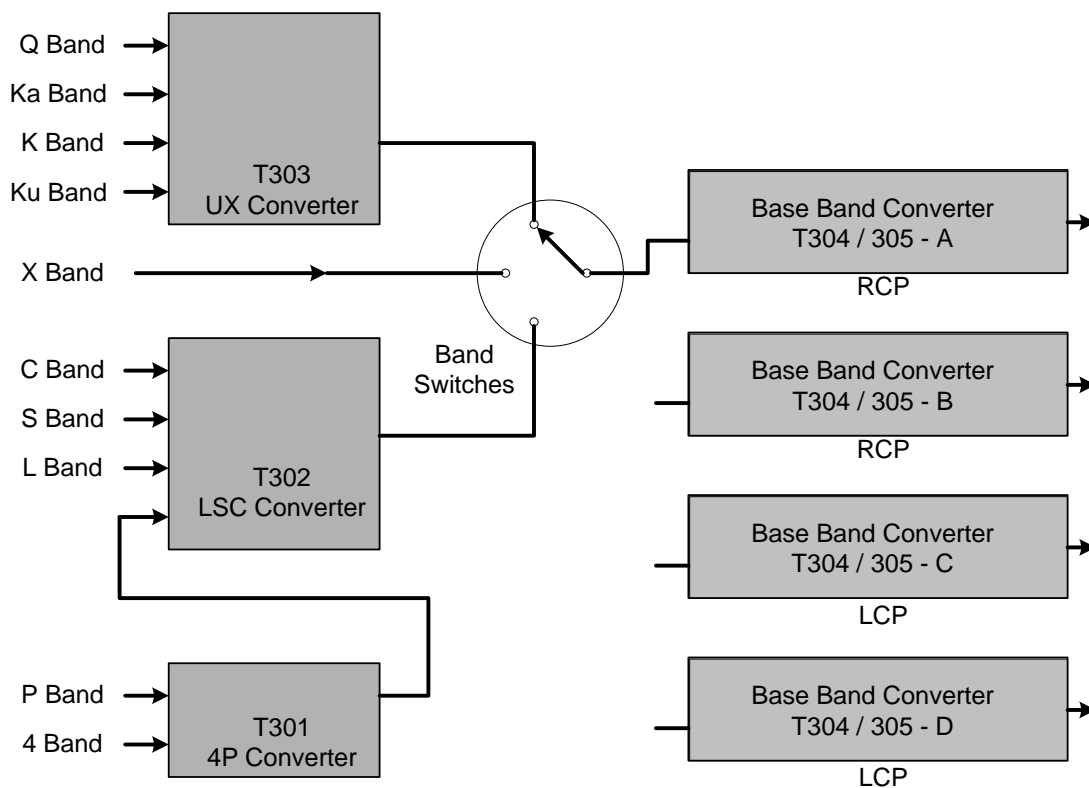


Figure 3.5 Microwave Synthesizers Configuration

### 3.1.6 Fiber Optic Transmission Systems

The EVLA makes extensive use of existing fiber optic technologies for the IF data transmission, the local oscillator/reference distribution, and all monitor/control functions. The block diagram for the Data Transmission System is shown in Figure 3.6.

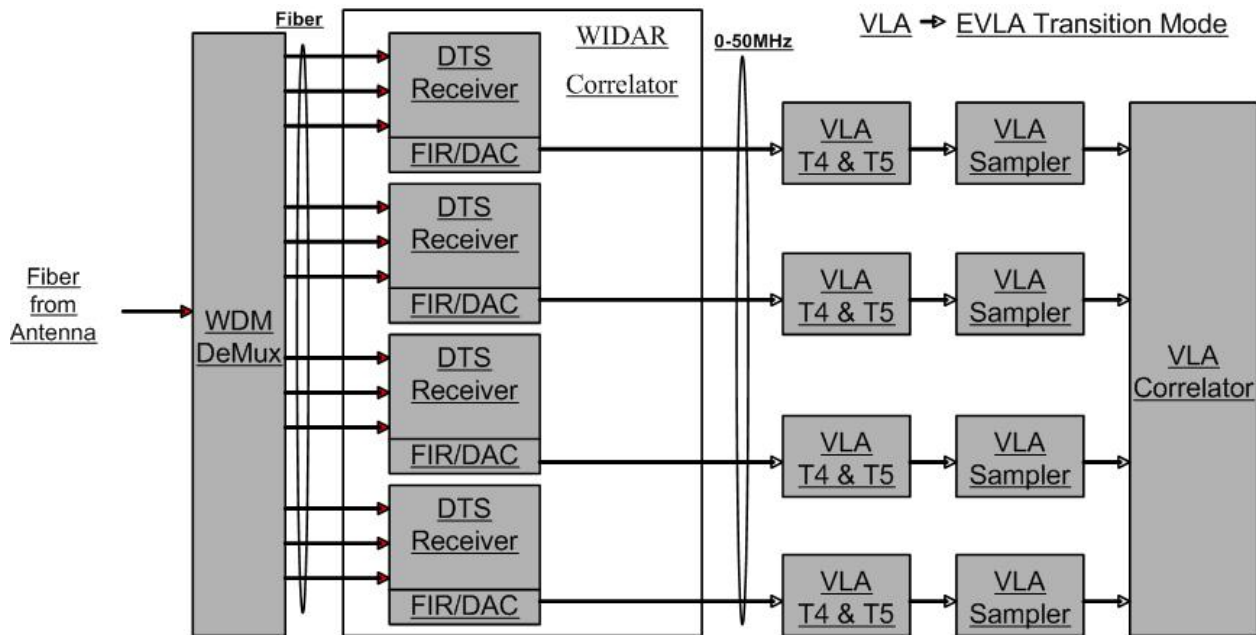


Figure 3.6 Data Transmission System Block Diagram

A set of twelve fibers runs to each pad location throughout the EVLA. The cables are set in a star configuration with all fibers originating at the control building and ending at each antenna pad. The fibers from the main distribution frame in the control building are grouped together into trunks and are terminated at each pad. The main distribution frame is a commercial product that will be filled to about 50% capacity at the end of the project.

### 3.1.7 Monitor and Control System

The antenna monitor and control system (AMCS) consists of processors located throughout the system from the control building to within the EVLA antennas themselves. Processors residing in the control building will have no limits on size and complexity and will take the form of either VME/Compact-PCI single crates or high reliability desktop machines. Processors located within the antennas will be small micro-controller type processor boards with small amounts of RAM and low clock speeds to help reduce RFI. These micro-controllers will interface the components of the



antenna to the rest of the monitor and control system; they are referred to as module interface boards (MIB's).

The antenna monitor and control system (AMCS) is responsible for operating the array of antennas including both the EVLA antennas as they come online and the existing VLA antennas during the transition phase. All AMCS processors, including the MIB's within the antennas, are networked using Ethernet over fiber optic cable.

### 3.2 Specifications and Requirements

The top-level technical requirements are provided in detail in Chapter 2, Section 2. The following sections present hardware configurations.

#### 3.2.1 Antennas Specifications

The present VLA antennas will not need major modifications to meet the scientific goals. The standard overhaul maintenance will be performed as each VLA antenna is converted to an EVLA antenna. Modifications are made as necessary to support the new feeds, front ends, electronics and fiber optic systems.

#### 3.2.2 Frequency and Polarization Coverage / Receiver Specifications

The EVLA system is designed for complete frequency coverage between 1 and 50 GHz. Both left and right hand circular polarizations are available over this entire frequency range. In addition, the EVLA system continues to support the existing 74 MHz and P-Band capabilities of the VLA. Table 3.2 shows the operational frequency bands along with the  $T_{sys}$ , efficiency, and polarizations of each band. Table 3.3 shows calculations for estimated system temperatures.

**Table 3.2 Operational Frequency Bands**

VLA Band	Frequency	Frequency Range	$T_{sys}$ (K) *	Efficiency **	Polarization
4	74 MHz	73.5-74.5 MHz	1000-10000	0.20	RHCP/LHCP
P	327 MHz	300 - 340 MHz	150-180	0.40	RHCP/LHCP
L	1.5 GHz	1.2 – 2.0 GHz	27	0.45	RHCP/LHCP
S	3.0 GHz	2.0 – 4.0 GHz	27	0.62	RHCP/LHCP
C	6.0 GHz	4.0 – 8.0 GHz	27	0.60	RHCP/LHCP
X	10.0 GHz	8.0 – 12.0 GHz	31	0.56	RHCP/LHCP
Ku	15.0 GHz	12.0 – 18.0 GHz	38	0.54	RHCP/LHCP
K	22.0 GHz	18.0 – 26.5 GHz	61	0.51	RHCP/LHCP
Ka	33.0 GHz	26.5 – 40.0 GHz	55	0.39	RHCP/LHCP
Q	43.0 GHz	40.0 – 50.0 GHz	70	0.34	RHCP/LHCP

\* At zenith, cool dry weather, referenced above the atmosphere

\*\* At mid band

Table 3-3. System Temperatures

$\nu_g$	BAND	Unvarying				Galactic and 3°bb (corrected for absorption)					Atmospheric Emission			System Temperature		
		$T_{rec}$	$T_{cal}$	$T_{spill}$	$T_o$	$T_{gal}$	$T_{bb}$	$T_{bg}$	$\tau$	$T_{bg}e^{-\tau}$	$T_{atm}$	$1-e^{-\tau}$	$T_{atm}(1-e^{-\tau})$	$T_{sys}$	$e^{\tau}$	$T'_{sys}$
1.450	L	13	1	8	22	0	3	3	0.008	3	280	0.004	1	26	1.008	27
3.000	S	13	1	8	22	0	3	3	0.009	3	280	0.004	1	26	1.009	27
6.000	C	15	1	6	22	0	3	3	0.010	3	280	0.005	1	26	1.010	27
10.000	X	19	1	5	25	0	3	3	0.012	3	280	0.008	2	30	1.012	31
15.000	Ku	24	1	5	30	0	3	3	0.017	3	280	0.015	4	37	1.017	39
22.000	K	32	2	4	38	0	3	3	0.065	3	280	0.063	18	59	1.067	65
34.000	Ka	38	2	4	44	0	3	3	0.020	3	280	0.020	6	53	1.020	56
45.000	Q	46	2	4	52	0	3	3	0.070	3	280	0.068	19	74	1.070	75
49.000	Q	46	2	4	52	0	3	3	0.250	2	280	0.221	62	116	1.250	140

$T_{rec}$  = Receiver Temperature

$T_{cal}$  = Injected Cal Signal

$T_{spill}$  = Ground Spillover Power

$T_{bg} = T_{bb} + T_{gal}$

$T'_{sys} = [T_o + T_{bg}e^{-\tau_{secz}} + T_{atm}(1-e^{-\tau_{secz}})] e^{\tau_{secz}}$

$T_{sys} = T_o + T_{bg}e^{-\tau_{secz}} + T_{atm}(1-e^{-\tau_{secz}})$

Assumptions:

> Elevation = 90°

> Coldest Part of Galaxy

> Driest Typical Atmosphere

> Winter Temperatures

### 3.2.3 Tuning Capabilities and LO-IF System Specifications

The EVLA system has the ability to tune two different frequency/polarization pairs anywhere within one or two frequency bands, with each pair providing up to 4 GHz of bandwidth in each polarization – a maximum total bandwidth of 16 GHz. In addition, the local oscillator system has the flexibility to function with both the new EVLA front ends and the existing VLA front ends. Table 3.4 shows the bands and bandwidths.

**Table 3.4 Sky Frequencies**

**Sky Frequencies and Sub-Bands (All Frequencies in GHz)**

Sky Frequency Band:	(1.0)1.2-2	2-4	4-8	8-12	12-18	18-26	26-40	40-50
Feed:	L	S	C	X	Ku	K	Ka	Q
Delta F:	1	2	4	4	6	8	14	10
Max Bandwidth of Sub-Band:	1	2	4	4	4	4	4	4
Number of Sub-Bands:	2	2	2	2	2	2	2	2

Four independently tunable second LO synthesizers are used, allowing greater tuning flexibility.

4-Band and P-Band capabilities continue to exist in the EVLA as they are in the VLA, except they will use the 8 bit samplers. These bands are up converted to L-Band and processed through the same IF chain. They can be used independently, together, or in conjunction with the other frequency bands.

An additional 4096 MHz fixed LO and conversion is provided for the narrowband path in each downconverter channel when using the higher resolution, lower bandwidth samplers. This LO is also used during the transition period. During the transition the existing VLA Correlator requires fringe rotation; in the final system, the WIDAR EVLA Correlator requires frequency offsets. These functions, along with the fine tuning steps, are provided by the direct digital synthesizers in the L302 modules.

#### 3.2.3.1 Local Oscillator Specifications

12-20 GHz Synthesizer:

Tuning:  $F=N*512 \pm 128\text{MHz}$ ,  $23 < N < 40$

LO source for Q/Ka/K-Band front ends, LSC converter and UX converter

10.8-14.8 GHz Synthesizer:

Tuning: 10.8-14.8GHz 48 bit resolution

LO source for main down converters

4096 MHz LO

Tuning: Fixed 4096 MHz

LO source for narrow band path of main down converters

Detailed designs and specifications of all LO synthesizers are described in detail in Chapter 6 of the EVLA Project Book.

These specifications for the LO stability, a repeat of the specifications given in Chapter 2, Section 2.2.3.3, do not include phase instability induced by the antenna structure or the atmosphere. These specifications do include any instability induced in the front end by the LO system. The specifications are evenly divided as follows: one-third to the front end, one-third to the T304 downconverter, and one-third to the 4P, LSC and UX converters combination. This specification applies after correction using round trip phase and phase rotation (fringe tracking).

A) Short Term:

The rms phase jitter over any 1 second interval is to be less than 500 fs.

B) Long Term:

The slope of the phase over any 30 minute interval is to be less than 200 fs/minute. The peak-to-peak fluctuations of the phase about this slope are to be less than 1400 fs.

C) Phase Shift with Pointing Change:

Less than 700 fs between any two directions accessible with the antennas.

Less than 70 fs per degree of antenna motion for slews of less than ten degrees.

Phase noise is defined as phase instability above an offset of 1 Hz from the frequency of concern. Phase drift is defined as the phase instability below an offset 1 Hz from the frequency of concern.

### 3.2.3.2 Baseband Down Converter Stage

There are four T304 down converter modules in each antenna. Each T304 is driven by a pair of an independent LO synthesizers and has a single IF input of 8-12 GHz. Each T304 can split the 4 GHz wide input into three baseband signals. Two of these can be up to 2 GHz wide and are in the passband from 2 to 4 GHz. A third baseband is provided for low bandwidth signals. This baseband, referred to as the 1-2 GHz, is fed to an 8-bit digitizer. This path has an additional conversion fed by a 4096 fixed LO.

The baseband outputs from each of the four downconverters will be harmonically sampled by a pair of 3-bit 4 Gsps digitizers. Alternatively, the 1-2 GHz baseband from each downconverter is digitized by an 8-bit 2 Gsps digitizer. It is also possible to use a mixture of 3-bit and 8-bit digitizers – the only limitation being that each downconverter can drive only one type of digitizer at a time.

The input and output noise power spectral distribution is nominally flat over the passband. Internal filters, in a daughter card configuration, are provided to either narrow the desired passband or notch out undesired areas within the passband. The

down converter modules also provide a total power measurement of each IF as well as each baseband signal.

### 3.2.3.3 Gain Flatness and Passband Ripple

The overall gain flatness of the EVLA FE/LO/IF system is specified as 5dB over any 2 GHz bandwidth with a design goal of 3dB over any 2 GHz bandwidth. These specifications have been divided as follows: one-third to the front end, one-third to the T304 downconverter, and one-third to the 4/P, LSC and UX converter combination. Passband ripple is specified to be a maximum of 0.2dB for ripple with a period less than 2 MHz.

### 3.2.4 Digitizers

The EVLA system digitizes data in the antenna vertex room. Data are sampled by high speed analog to digital (A/D) converters. There are three digitizers available to users. The first pair consists of wide bandwidth devices with 3-bit resolution that are used for most observing modes of the EVLA. Current plans call for the use of commercial 4 Gsps 3-bit devices. These wideband digitizers will normally be used at C, X, Ku, K, Ka, and Q band.

The third sampler is a narrower bandwidth 8-bit 2 Gsps commercial A/D converter. This sampler has a higher bit resolution and is used for observing in bands with high levels of radio frequency interference (RFI). The present EVLA antennas are currently using the upper 8 bits of a commercial 10-bit, 2 Gsps sampler from ATMEL, part number TS83102G0B. In the future, this sampler will typically be used for S, L, P, and 4 bands.

During the transition period, the 8-bit digitizer will be used to provide a VLA correlator compatible signal. The IF signal is filtered to a bandwidth of 1-2 GHz, digitized, and is transmitted to the CEB over fiber as a digital signal. In the CEB, the data is filtered using digital FIR filters, decimated, spectrally inverted (in the digital domain), then converted back to analog using a D/A converter. This analog signal is then fed into the VLA correlator using the existing VLA baseband electronics and samplers.

### 3.2.4.1 Wideband Digitizer Specifications

Sampling rate:	4.096Gsps (good up to 5 Gsps)
Bit resolution:	3 bits
Quantization levels:	8 levels
Aperture time:	<50 ps
Jitter:	~2 ps
Threshold indecision region:	3-4 mv
Analog bandwidth:	2-4 GHz.
Analog bandwidth ripple	+0, -0.5 dB
Analog input level:	0 dBm broadband signal
Sampling bands:	Passband: 2.048-4.096 GHz
Clock input:	4.096 GHz Sinewave, 0dBm
Output coding:	3 bit Grey code
	$V_{in} < -1.5x$ 000
	where x = RMS voltage at comparator
	$-1.5x < V_{in} < x$ 001
	$-x < V_{in} < -0.5x$ 011
	$-0.5x < V_{in} < 0$ 010
	$0 < V_{in} < 0.5x$ 110
	$0.5x < V_{in} < x$ 111
	$x < V_{in} < 1.5x$ 101
	$V_{in} > 1.5x$ 100
Output de-multiplexing:	1:16
Output data word width/rate:	48(16x3) bits / 256 MHz
Output logic:	Low Voltage Differential Signaling (LVDS)
Power supply:	+48 Vdc, 35 Watts (approx)

### 3.2.4.2 Narrow Band Digitizer Specifications

Sampling rate:	2.048 Gsps
Bit resolution:	8 bits
Sampler full scale input	3 dBm - using a sine wave input *
Typical 8 count RMS input	-24 dBm – using a broadband input*
Quantization levels:	256
Aperture time:	<160 ps
Jitter:	<160 ps
Threshold indecision region:	2 mV
Analog bandwidth:	1-2 GHz
Sampling bands:	Passband: 1-2 GHz
Output de-multiplexing:	1:8
Output data word width/rate:	64(8x8) bits / 256 MHz
Output logic levels:	Low Voltage Differential Signaling (LVDS)
Power supply	48 Vdc, +/- 6 Vdc, +/- 5 Vdc, 3.3 Vdc,

\*The DTS module has a 14dB gain/isolation amplifier on the inside of the front panel. This reduces these numbers by 14dB when considering the DTS module input.

### **3.2.5 External RFI**

The EVLA system is being designed to operate in the presence of ever increasing levels of radio frequency interference (RFI). The design of the WIDAR correlator, as well as the use of three and eight bit quantization in the digitizers, plays a major role in the systems immunity to external RFI. A further discussion of RFI is located in Section 3.7.

### **3.2.6 Suppression and Mitigation of Self Generated RFI**

The EVLA system is also susceptible to RFI generated on site and within the EVLA's own systems. Sources of this RFI include:

- High speed digital electronics in the antenna pedestal and vertex rooms
- LO/Reference systems in the EVLA antennas and central building
- High speed computers and networks covering the entire VLA site
- High speed digital electronics in the existing and new correlators
- Electronics systems in the ALMA test interferometer
- Site two-way radio communications.

All of these systems must be built and tested to minimize RFI emission levels. The levels are specified in EVLA Memo #46, RFI Emission Goals for EVLA Electronics, Rick Perley, 10/15/02.

### **3.2.7 Monitor and Control**

The monitor and control (M&C) system of the EVLA is based entirely on a TCP/IP based Ethernet. Fiber based Gigabit Ethernet is being used for the antenna field and major computer systems. A combination of fiber and shielded twisted pair based 100 megabit Ethernet is used in the antenna electronics systems and between some computing systems in the CEB.

### **3.2.8 Correlator**

The WIDAR correlator is being built in Canada for the EVLA project. The correlator specifications are presented in Chapter 8.

### **3.3 System Block Diagrams**

The following block diagrams are available on-line as PDF and MS-Visio files.

#### **3.3.1 Antenna System Diagram**

To be added in the future.

#### **3.3.2 Antenna RF/LO/IF Electronics**

[antenna block diagram](#)

#### **3.3.3 CEB LO/IF Electronics**

[CEB block diagram](#)



### **3.4 Acceptance Testing**

Acceptance tests are structured to be used by the Electronics and Engineering Services Divisions. The purpose is to provide a set of tests that determine if an antenna is ready to be turned over to the Operations Division. Since the topology of the antennas is not going to change and all of electronic modules have passed individual modules tests, the acceptance tests focus on system performance. The following is a list of acceptance tests when successfully completed indicate that an EVLA antenna is ready to be turned over to the Socorro Operations Division.

#### **3.4.1 Receiver Noise Diode Test**

Digitize the analog signal out of the receiver while the noise diode is being switched at 9.6 Hz. Transmit the signal over the digital link and recreate the signal at the output of the T-5. Arrange the LO settings so the same signal is sent to each of the four DTS modules. This test determines any artifacts of the conversion and filtering process. The bit-error-rate of all 12 links is also measured during this test. Each receiver will be tested for approximately one minute.

##### **Noise Calibration:**

Each receiver is provided with an injected noise signal equivalent to approximately 5% of the nominal system temperature for that band. This noise can be commanded on or off by the monitor and control system (M&C). During normal observing, it is controlled by a 9.6 Hz square wave with 50% duty cycle. The noise for both LCP and RCP on any receiver is generated by a single source on that receiver.

##### **Purpose:**

This test verifies the function of the 8-bit digitizers, the formatters, the optical link, the output of the digital-to-analog converter on the DTS de-formatter module and the T-5 operation. The same LCP and RCP signal is presented to each of the four samplers so a comparison can be made.

##### **Requirements:**

- ♦ A complete set of receivers
- ♦ A complete LO system
- ♦ 9.6 Hz clock signal
- ♦ Installed fiber cable wrap and vertex room fiber termination box
- ♦ A complete set of D30X modules in the antenna with MIB control, 8-bit samplers
- ♦ EDFA installed in the CEB
- ♦ Four DTS deformatter boards in CEB
- ♦ T-4 and T-5 modules

##### **Technique:**

The M&C will be used to configure the antenna and then perform each test. After 30 seconds, the M&C will capture and upload the digital data from the deformatter. This data will then be processed and provided as a plot for each IF.

During the test, the output of the T-5 will be monitored with a spectrum analyzer and oscilloscope to determine the bandpass shape, correct switched power and total output power levels being sent to the VLA correlator.

The M&C will flag and print any monitor data that is out-of-range during the test. This will include monitor data from all modules on the antenna and related modules in the control building.

The M&C will test all eight receivers in sequence and print the data at the conclusion of the test.

### 3.4.2 Cable Wrap Optical Round Trip Phase

This test requires very little from the antenna as no power or active modules are required. The passive optical coupler located in the L304 module is all that is required to complete the loop in the antenna. Most of the modules under test are located in the CEB.

#### **Purpose:**

This test verifies that the LO optical link which provides the main LO of 512 MHz to the antenna is functioning.

#### **Requirements:**

- ♦ EVLA digital phase detector system
- ♦ L304 modules in the vertex room of the antenna
- ♦ All control room 512 MHz modules present and working (L350, L352, L353)
- ♦ The 1024 MHz and 128 MHz need to be phase locked
- ♦ Installed fiber cable wrap and vertex room fiber termination box
- ♦ Monitor data from L352

#### **Technique:**

Connect a spectrum analyzer to the output of the L304 module and determine the levels of the sidebands around the 512 MHz.

### 3.4.3 Check Round Trip Phase Stability with Antenna Moving

#### **Purpose:**

This is a test of round trip stability with the antenna moving and verification of the performance of the round trip phase hardware. This test is designed to detect any effect of antenna motion on the phase difference between the round trip fibers. The resolution of the test is estimated to be not better than 0.5 ps.

#### **Requirements:**

- ♦ A round trip fiber loop to the antenna
- ♦ All control room 512 MHz modules functioning

- ♦ Installed fiber cable wrap and vertex room fiber termination box
- ♦ Monitor data from L352
- ♦ Computer control of antenna in AZ/EL coordinates
- ♦ Software for application of RT phase to correlator data
- ♦ Fully functional LO/IF system

**Technique:**

Using the EVLA monitor and control system (M&C), monitor the round trip phase as the antenna is moved in both directions

**Results:**

Phase sensitivity to antenna motion

### 3.4.4 Power System Test 48 Vdc

Testing RFI, temperatures, full current, battery back-up, and output noise.

**Purpose:**

The 48 Vdc power supply will be tested prior to the Receiver Noise Diode Test. The test includes testing the battery backup operation, voltage quality under full load, and emergency shut down.

**Requirements:**

- ♦ Functional 48 Vdc power supply in the pedestal room
- ♦ Installed cable wrap

### 3.4.5 Front End Bench Test Data

The Front End group will provide the Socorro Operations Division with laboratory test results for each receiver. This data will be presented in both as tables and graphs. The following data shall be provided:

Across the band: (frequency independent)

- Receiver temperature
- Noise calibration values
- Gain
- Output power
- 1dB compression
- Serial numbers
- Tcal as a function of frequency

Frequency-independent data:

- Cold-stage temperatures vs. time during cool down
- Cold-stage temperatures during bench test
- Typical current for each supply voltage

The following monitor data will be recorded by the M&C system:

- Dewar Temperature: 15K, 50K stations and case temperature
- Dewar and Manifold Vacuum
- LNA FET biases voltages and currents for each stage of each LNA
- Noise source parameters: voltage, current, and attenuator setting
- Switch positions and gains for normal or solar observing
- Receiver ID: Band, serial number, and revision level

The Monitor and Control system can command the following actions:

- Cool-down, warm-up, pump dewar
- Set configuration for normal or solar observing

### 3.4.6 LO Reference Signal Quality

The LO is obtained from the master oscillator located in the Electronics Building. A 512 MHz signal is transmitted over a dedicated single mode fiber at 1310 nm. The L304 receives the optical signal, converts it to electrical (RF) and sends it to the L305. The L305 uses this signal to phase lock a low noise VCXO whose output becomes the antenna master LO reference. A portion of the optical LO 512 MHz signal is sent back to the control building where it is converted to an electrical (RF) signal in the L353 module and sent to the L352 module. The L352 then makes the round trip phase calculation.

#### **Purpose:**

Determine phase stability of the 512 MHz LO after a round trip to the antenna.

#### **Requirements:**

- ♦ All control room 512 MHz modules
- ♦ Fiber cable wrap and vertex room fiber termination box installed
- ♦ L304 module in the antenna
- ♦ Monitor data from L305

#### **Technique:**

Using the maser-referenced 512 MHz, measure the phase noise at the output of the L353 module. This signal is used to determine the round trip phase of the LO system.

### 3.5 Hardware Development

With the exception of the WIDAR correlator, the vast majority of the EVLA electronics hardware is being developed in the labs at the NRAO Array Operation Center in Socorro, New Mexico. The NRAO/AOC labs are set up to:

- Construct prototypes for all EVLA hardware
- Manufacture low-volume production components
- Repair and maintain EVLA components for the life of the system

To accomplish this, substantial investments are being made in Computer Aided Design/Computer Assisted Engineering (CAD/CAE) software, modern analog and digital test equipment, surface mount soldering equipment, and personnel training.

The manufacturing of bare printed circuit boards and large volume production components is outsourced to contractors in the United States and Canada.

#### 3.5.1 Test and Laboratory Equipment

Due to the greatly enhanced requirements of the EVLA electronics, advanced test and laboratory equipment is required for the development and maintenance of the EVLA hardware over the life of the system. The following chart shows the equipment required for the EVLA.

Equipment	Systems
High Speed Digital Scope (2.5GHz)	DTS, LO/IF, Digitizers, Correlator
Digital Scopes (min 500 MHz BW)	DTS, LO/IF, Front Ends, Systems, M&C
Optical Spectrum Analyzer	DTS, LO/IF
Microwave Spectrum Analyzers (x)	LO/IF, RFI, Digitizers, Front Ends
Vector Network Analyzer	LO/IF, Front Ends, DTS, RFI
OC192 Communication Analyzer	DTS
High Speed Logic Analyzer	DTS, Digitizers, M&C
Phase Noise Test Set	LO/IF
Signal Generators (x)	LO/IF, Front Ends, DTS
Receiver Test Rack	Front end

#### 3.5.2 Engineering Design and Test Software

Design, development and testing of EVLA hardware is being performed largely using commercially available software packages. These include (but are not limited to):

- ♦ MicroSoft Visio 2002 or AutoCad 2000i (or later) for block diagrams and other system documentation
- ♦ Protel 99SE (or later), PadsPCB or OrCad v.9.1 (or later) for schematic and PCB design

- ♦ Xilinx Foundation-Classic or Foundation-ISE v.4.1 (or later) or Altera Quartus (latest release) for FPGA and CPLD development
- ♦ AutoCad 2000i (or later) or AutoCad Inventor v.5 (or later) for mechanical designs
- ♦ LabView 6.0i (or later) for bench testing and integration, as well as for test fixtures to be used for maintenance over the life of the EVLA system

### 3.5.3 Hardware Design Standards

#### 3.5.3.1 Units and Measurements:

All units and measurements in the EVLA systems are imperial to maintain compatibility with existing VLA standards

#### 3.5.3.2 EVLA Electronics Rack, Bin, Module, and Connector Numbering System

A numbering system based on the existing VLA system is used to identify EVLA racks, bins, modules and connectors. This numbering system is defined in EVLA specification number A23010N0001.

#### 3.5.3.3 EVLA Module Names and Numbers

T301	4P Converter	Converts 4/P band to L-band
T302	LCS Converter	Converts L, S and C band to X-Band (incl 4 and P IF)
T303	UX Converter	Converts Ku Band to X-Band (incl K, Ka and Q IF) Bypasses X-Band IF
T304	Base Band Converter Analog	Converts X-Band to 1-2 and 2-4 GHz digitizer Inputs
T305	Base Band Converter Digital	Digital control and total power digitizers for T304
L300	Synthesizer Reference Generator	Provides comb generator to L301 & L302
L301	12-20 GHz Synthesizer	LO source for K, Ka and Q front ends LO source for UX converter LO source for LCS converters
L302	10.8-14.8 GHz Synthesizer	LO source for downconverters
L304	LO/Reference Receiver	Receives 512 MHz LO & timing from LO fiber
L305	Antenna Reference Generator	Generates and distributes reference and timing signals in antenna
L350	Central Reference Generator	Generates and distributes reference and timing signals in control building
L351	Master Offset Generator	Generates reference signals for round trip phase measurement

L352	Round Trip Phase	Measures LO round trip phase to each antenna
L353	LO Transmitter / RTP Receiver	Transmits 512MHz LO to ant, receives 512 MHz return signal
L354	LO Reference Driver	Distributes LO signals in control building racks
L355	Timing Distribution	Distributes digital timing signals in control building racks
P301	LO/IF Power Supply	DC/DC converter for LO/IF bins
P302	FE/UX Power Supply	DC/DC converter for front ends and UX converter
P350	LO Power Supply	DC/DC converter for LO master racks
P351	LO/RTP Power Supply	DC/DC converter for LO Transmitter and RTP modules
D301- D304	Sampler/DTS	3 and 8 bit digitizers, IF data transmission formatters, fiber optic transmitters
M301	Switch Controller	Controls LO/IF Switches and T301-3 downconverters
M302	Utility Module	General purpose M&C module in the pedestal room
M303	Utility Module	General purpose M&C module in the vertex room
M304	Module ID	Provides network addressing information to modules
F317	Front End M&C Module	Front end M&C module
F320	Front End Transition Module	Provides interface between existing VLA front ends and EVLA system

### **3.5.3.4 EVLA Drafting Numbering System**

The EVLA Drafting numbering system is outlined in EVLA specification number A23010N0002. The numbering system(s) described in this document is used for all work in the NRAO Electronics Division, Computing Division, and Central Development Lab (CDL). In addition, it is used for all NRC/DRAO based EVLA work.

The NRAO Engineering Services Division is continuing the use of their current numbering system, originally defined by the VLA antenna vendor.

### 3.5.4 Hardware Environmental Requirements

#### 3.5.4.1 Antenna Vertex Room Electronics

These specifications are for survivability. Individual modules or components may have additional requirements to maintain certain operational specifications (gain, phase stability, etc.). These additional requirements are listed with the applicable equipment.

Operating temperature:	0 to +50 C
Storage temperature:	-20 to +70 C
Humidity:	0 to 95% non-condensing
Altitude:	7200 ft AMSL
Operational orientation:	Any position *
Storage orientation:	Any Position
Shock:	5 G
Vibration:	5 G

\* Modules must remain at a fixed position within the rack/bin for cooling purposes.

#### 3.5.4.2 Antenna Pedestal Room Electronics

These specifications are for survivability. Individual modules or components may have additional requirements to maintain certain operational specifications (gain, phase stability, etc.). These additional requirements are listed with the applicable equipment.

Operating temperature:	0 to +50 C
Storage temperature:	-20 to +70 C
Humidity:	0 to 95% non-condensing
Altitude:	7200 ft AMSL
Operational orientation:	Upright
Storage orientation:	Any Position
Shock:	5 G
Vibration:	5.0 G

#### 3.5.4.3 Antenna Apex Electronics

These specifications are for survivability. Individual modules or components may have additional requirements to maintain certain operational specifications (gain, phase stability, etc.). These additional requirements are listed with the applicable equipment.

Operating temperature:	-20 to +70 C
Storage temperature:	-20 to +70 C
Humidity:	0 to 100% condensing
Altitude:	7200 ft AMSL
Operational orientation:	Any position
Storage orientation:	Any Position
Shock:	5 G



Vibration: 5.0 G

### 3.5.4.1 Control Building Electronics

These specifications are for survivability. Individual modules or components may have additional requirements to maintain certain operational specifications (gain, phase stability, etc.). These additional requirements are listed with the applicable equipment.

Operating temperature: 0 to +50 C  
Storage temperature: -20 to +70 C  
Humidity: 0 to 70% non-condensing  
Altitude: 7200 ft AMSL  
Operational orientation: Upright  
Storage orientation: Any Position  
Shock: 5 G  
Vibration: 5 G

### 3.5.5 Antenna Racks, Bins and Modules

The EVLA LO/IF system uses a modified version of the VLA antenna rack and bin specifications. This allows reuse of racks and some system components, particularly during the transition period. It also allows for the cannibalization of some existing system hardware to reuse costly, custom machined hardware. The specifications and designs of this hardware have been modified as necessary to meet RFI/EMC and cooling requirements of the new EVLA electronics system. The connectors are being updated to eliminate obsolete, hard-to-find or excessively expensive components. Due to reliability and performance concerns, all blind mate connectors have been eliminated from the EVLA system.

Due to high RFI risk and high heat dissipation, the digitizers and IF data transmission systems use a completely new packaging concept. This packaging consists of an RFI shielded, air cooled module design that houses the 3-bit digitizers, 8-bit digitizers, and data transmission system (DTS) hardware for a single polarization pair.

The Ethernet networking hardware used for the monitor control bus (MCB) in the antenna vertex room requires special shielding. A custom designed rack with an integrated fiber optic patch panel has been designed for this purpose.

### 3.5.6 CEB Racks, Bins and Modules

The EVLA LO system uses a modified version of the VLA rack and bin specifications for the LO systems in the central electronics building. This is done to allow reuse of racks and some system components, particularly during the transition period. It also allows for the cannibalization of some existing system hardware to reuse costly, custom machined hardware. The specifications and designs of this hardware are modified as necessary to meet RFI/EMC and cooling requirements of the new EVLA electronics system. The connectors are being updated to eliminate obsolete, hard-to-find or

excessively expensive components. Due to reliability and performance concerns, all blind mate connectors have been eliminated from the EVLA system.

The fiber optic systems will be using commercial off the shelf hardware for cable splicing, routing and patch panels.

### **3.6 System Power Supplies**

#### **3.6.1 Antenna Electronics Systems**

Antenna vertex room, pedestal room and apex electronics are powered from N+1 redundant 48 Vdc power supplies. Final voltage regulation occurs at the module or bin level. Final regulators can be linear type devices, switching (PWM) type devices, or a combination of the two depending on RFI and thermal requirements. A backup power feature is provided by a bank of 48 Vdc gel cell type batteries located in the pedestal room. Commercial equipment such as networking equipment, and test equipment can be powered from 120VAC commercial power. The network routers, voice communication equipment, and all alarm/safety related equipment is powered by the battery backup 48 Vdc power supply and can be operated for a minimum of 180 minutes in the event of a power failure.

#### **3.6.2 CEB Electronics Systems**

LO/IF electronics in the central electronics building are powered from N+1 redundant 48 Vdc power supplies. Final voltage regulation occurs at the module or bin level. Final regulators can be linear type devices, switching (PWM) type devices, or a combination of the two depending on RFI and thermal requirements. As an option, backup power is provided by the addition of 48 Vdc gel cell type batteries. Commercial equipment in the LO/IF racks, such as computers, networking equipment and test equipment, will be powered from 120VAC commercial power.

The Hydrogen Maser and other critical time standard devices are to have battery backup for a minimum of 15 minutes of operation in the event of a power failure.

#### **3.6.3 Correlator**

The correlator and digital IF fiber optic receiver systems are powered by a high capacity 48 Vdc battery system that is continuously fed from the site AC power. This is currently planned to be a packaged system from a commercial vendor. These are common in telecommunications industry components and are readily available as turn-key systems from a number of sources.

#### **3.6.4 Computing and Network Hardware**

All computing and networking hardware is operated from the site AC power and uses battery backed Un-interruptible Power Supplies (UPS).

### **3.7 RFI**

One of the primary EVLA design criteria is to be able to observe in a hostile environment of radio frequency interference (RFI). The wide bandwidths and frequency tuning range of the EVLA greatly increase our exposure to radio frequency interference (RFI). The centimeter wavelength bands are being increasingly filled by wireless communication: cell phones, pagers, aeronautical navigation and traffic control, satellite broadcast, and many other services. Terrain shielding, which for decades helped isolate radio observatories from RFI, is becoming less relevant as interference from broadcast and communication satellites, balloons, and airplanes increases. A modern broadband radio astronomy system needs to have greater sensitivity and bandwidth to do the new science, but also has to work amidst a growing forest of strong and potentially debilitating artificial signals. The new receivers and transmission system are designed with particular attention to the extra demands imposed by these signals.

#### **3.7.1 Design Goals**

Our goal is to design a system that: 1) can function with strong man-made signals in the receiver passband without corrupting the visibility measurements due to spurious intermodulation products, 2) has the necessary dynamic range to enable handling of strong signals (both man-made and natural, in both the spatial and frequency domains), 3) has extremely linear response. This was accomplished by a layered approach, each layer avoiding or removing RFI which can cause nonlinearities in the subsequent electronics. This was essential for utilization of the full bandwidth brought from the antennas. Nonlinearities and spurious signals were avoided by designing each stage with over 18dB of head room. At the top layer, this is accomplished by using the minimal amount of amplifier gain and careful design for linear response. Signals are then digitized in the antenna with either 3 or 8-bit digitizers. The latter provides a narrower bandwidth higher dynamic range signal for improved RFI immunity.

The final layer of RFI excision is in the digital correlator itself. The DRAO WIDAR correlator design provides for outstanding immunity to strong RFI with spectral dynamic ranges in excess of 55dB. The new correlator is designed to tolerate strong interfering signals by having a sufficiently large number of high-resolution frequency channels to permit avoidance of data contaminated by narrow-band RFI signals.

In addition, total power measurements are available at several places in the system in order to monitor RFI.

### 3.7.2 Environmental Monitoring System

The purpose of the RFI EMS is to measure the characteristics of externally generated RF signals that are incident on the VLA, and which the EVLA electronics has to tolerate. These characteristics include frequency, power, modulation, time on and off, and direction of incidence. The EMS is designed to provide calibrated power levels in terms of power flux density (PFD) per various resolution bandwidths, and ultimately operate over 300 MHz - 50 GHz.

The current system includes:

- Antennae: 1-8 GHz omni-directional  
1-18 GHz directional horn on rotator
- Front End: 3 MHz -10 GHz
- Signal Path: Operational up to 18 GHz
- Receiver: HP70001A spectrum analyzer operational up to 22 GHz, with narrowest RBW = 10 Hz.
- Tower: Antennae and Front End mounted on 54 foot tower at the VLA

### 3.7.3 System Hardware Emission Testing Facilities

The purpose of the RFI EMC facility is to measure the characteristics of radiated RF signals from electronic equipment designed for the EVLA. The chamber and associated test equipment is to ultimately operate over the 300 MHz - 50 GHz range and measure total power of emissions.

The current system includes:

- Facility: RF Shielded Chamber specified at 100dB shielding up to 10 GHz.
- Front End: 300 MHz -12 GHz amplifiers.
- Signal Path: Operational up to 18 GHz
- Receiver: HP70001A spectrum analyzer operational up to 22 GHz with narrowest RBW = 10 Hz.