

RFT SERIES



- ☐ Compac's RFT Series Enclosures have shielding capabilities to 60 dB at 3 GHz
- ☐ Independent access from either side
- ☐ Greater Interior Acreage
Construction Specs: Case — A_6063T52 Covers — AL 5052-H32 finish chemical film per MIL C 5541 Class 3
Conformance to MIL 45208A

HOW TO ORDER:

R-51110 - 138 - 0 (N)

CASE PART NO. _____

CASE HEIGHT _____
 075 - 0.75 175 - 1.75
 100 - 1.00 212 - 2.12
 138 - 1.38 250 - 2.50

COVER TYPE _____
 0 - Standard flush
 1 - Extended

ADD FOR NICKEL PLATE _____

CUSTOM HIGHLIGHT FROM COMPAC'S RFT SERIES


Compac will modify our RFT Series Enclosures to meet your needs.

- Drilling
- Tapping
- Milling
- "D" Punching
- Cut Outs for Subminiature Connections
- Silk Screening, Painting

Work is done from your prints or to your specifications.

For your convenience Compac has included on page 7 a request for quote with a rendering of a Compac Case to depict your modifications.

COMPAC
 1320-13 LINCOLN AVENUE
 HOLBROOK, NEW YORK 11741
 TELEPHONE (631) 585-3400
 FAX (631) 585-3534
 www.compac-rf.com

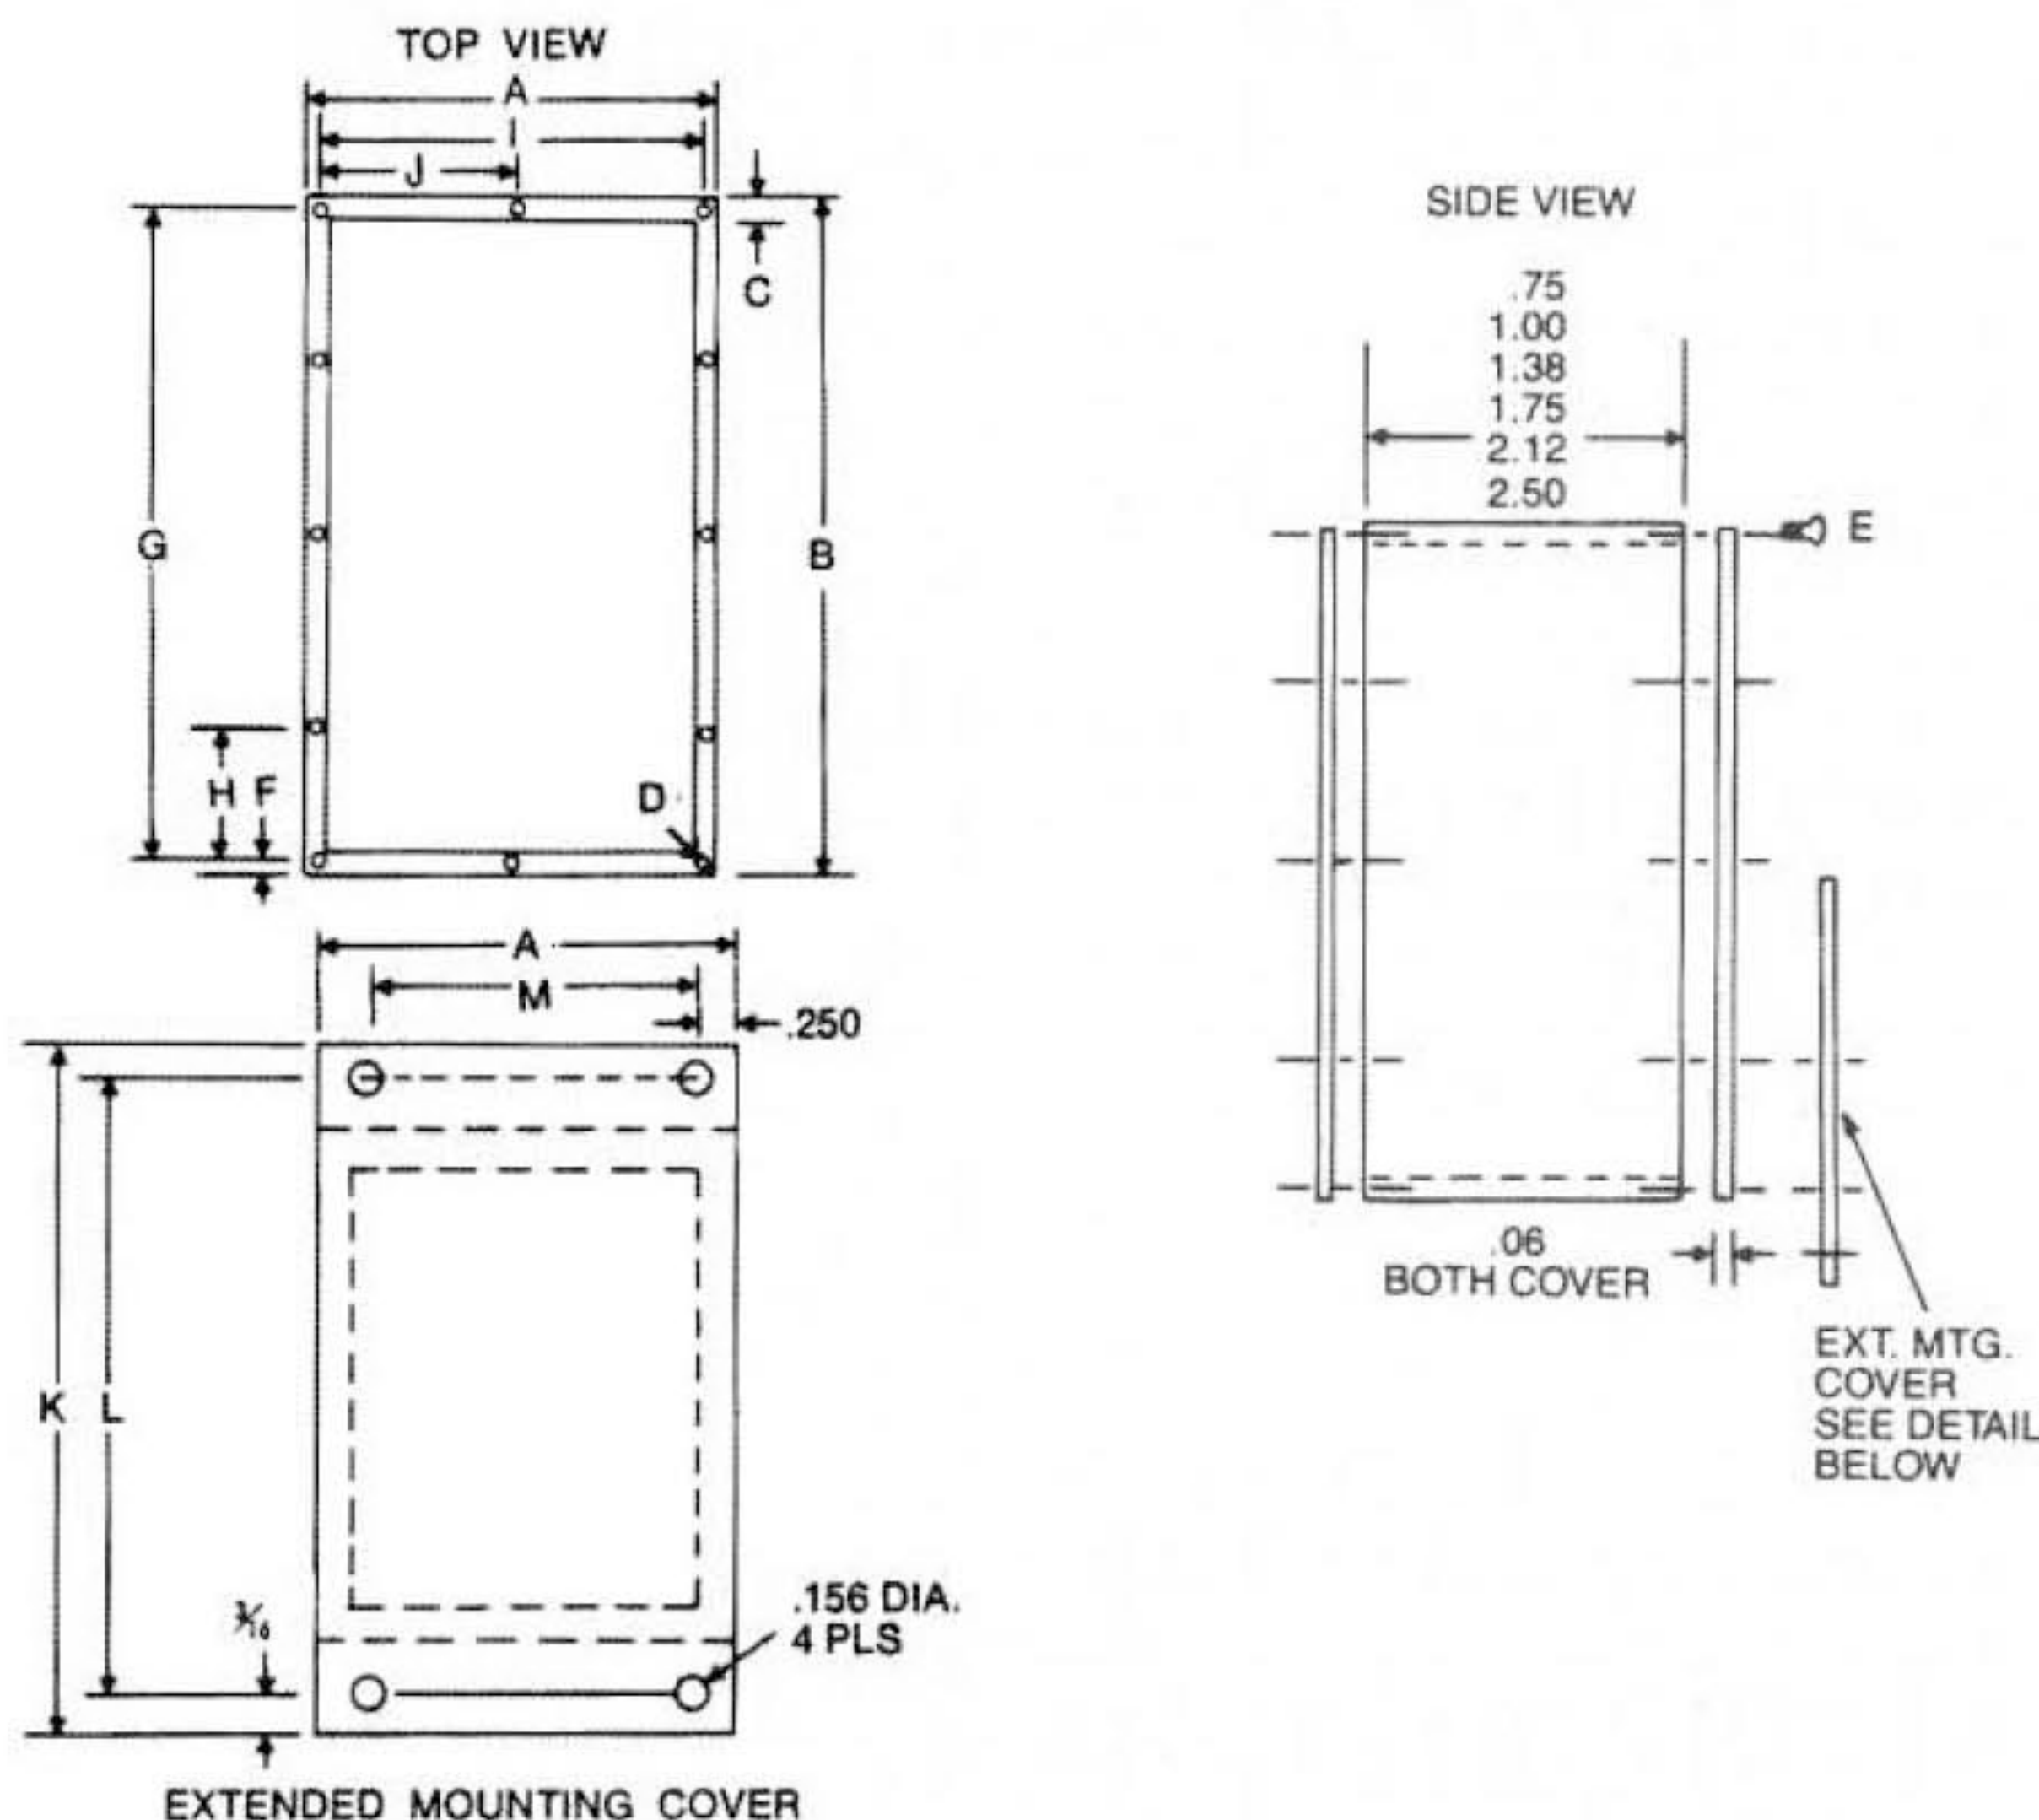

	A	B	C	D*	E	F	G	H	I	J	K	L	M
R51070	0.75	0.75	.125	4	0-80	.070	0.610	—	0.610	—	1.50	1.125	.375
R51075	0.75	1.50	.125	4	0-80	.070	1.360	—	0.610	—	2.25	1.875	.375
R51080	1.00	1.00	.125	4	0-80	.070	.860	—	0.860	—	1.75	1.375	.50
R51085	1.00	1.50	.125	4	0-80	.070	1.360	—	0.860	—	2.25	1.875	.50
R51088	1.00	2.00	.125	6	0-80	.070	1.860	0.930	0.860	—	2.75	2.375	.50
R51090	1.25	1.25	.125	4	0-80	.070	1.110	—	1.110	—	2.00	1.625	.75
R51095	1.25	2.50	.125	6	0-80	.070	2.360	1.180	1.110	—	3.25	2.875	.75
R51097	1.25	3.00	.125	6	0-80	.070	2.860	1.430	1.110	—	3.75	3.375	.75
R51100	1.50	1.50	.125	6	0-80	.070	1.360	.680	1.360	—	2.25	1.875	1.00
R51110	1.50	2.00	.125	6	0-80	.070	1.860	.930	1.360	—	2.75	2.375	1.00
R51120	1.50	2.50	.125	6	0-80	.070	2.360	1.180	1.360	—	3.25	2.875	1.00
R51125	1.50	3.25	.125	6	0-80	.070	3.110	1.555	1.360	—	4.00	3.625	1.00
R51130	1.50	6.00	.125	10	0-80	.070	5.860	1.465	1.360	—	6.75	6.375	1.00
R51140	1.75	1.75	.125	6	0-80	.070	1.610	.805	1.610	—	2.50	2.125	1.25
R51150	1.75	3.00	.125	6	0-80	.070	2.860	1.430	1.610	—	3.75	3.375	1.25
R51155	1.75	4.00	.125	10	0-80	.070	3.861	1.287	1.610	.805	4.75	4.375	1.25
R51160	2.00	2.00	.125	8	0-80	.070	1.860	.930	1.860	.930	2.75	2.375	1.50
R51170	2.00	3.00	.125	8	0-80	.070	2.860	1.430	1.860	.930	3.75	3.375	1.50
R51180	2.00	4.00	.125	10	0-80	.070	3.860	1.286	1.860	.930	4.75	4.375	1.50
R51190	2.00	5.00	.125	12	0-80	.070	4.860	1.215	1.860	.930	5.75	5.375	1.50
R51200	2.00	6.00	.125	12	0-80	.070	5.860	1.465	1.860	.930	6.75	6.375	1.50
R51205	2.50	2.50	.125	8	0-80	.070	2.360	1.180	2.360	1.180	3.25	2.875	2.00
R51210	3.00	3.00	.125	8	0-80	.070	2.860	1.430	2.860	1.430	3.75	3.375	2.50
R54030	3.00	4.00	.125	10	0-80	.070	3.860	1.287	2.860	1.430	4.75	4.375	2.50
R51235	4.00	4.00	.125	12	0-80	.070	3.860	1.287	3.860	1.287	4.75	4.375	3.50
R51220	3.00	5.00	.125	12	0-80	.070	4.860	1.215	2.860	1.430	5.75	5.375	2.50
R51225	3.00	5.00	.188	12	2-56	.094	4.812	1.203	2.812	1.406	5.75	5.375	2.50
R51230	3.00	6.00	.188	12	2-56	.094	5.812	1.453	2.812	1.406	6.75	6.375	2.50
R51335	4.00	6.00	.125	14	0-80	.070	5.860	1.465	3.861	1.287	6.75	6.375	3.50
R51250	5.00	6.00	.188	14	2-56	.094	5.812	1.453	4.812	1.604	6.75	6.375	4.50
R57050	5.00	7.00	.188	16	2-56	.095	6.810	1.362	4.812	1.604	7.75	7.375	4.50
R58060	6.00	8.00	.188	18	2-56	.095	7.810	1.562	5.812	1.453	8.75	8.375	5.50
R58010	8.00	10.00	.187	22	2-56	.095	9.810	1.635	7.810	1.562	10.75	10.375	7.50
R59012	9.00	12.00	.187	30	2-56	.094	11.808	1.312	8.814	1.469	12.75	12.375	8.50

*D = Number of cover screws

Specifications subject to change without notice.

R51110 - 138 - 0 - (N)/MOD/XXX

CASE PART NO. _____

CASE HEIGHT _____
 075 - 0.75 175 - 1.75
 100 - 1.00 212 - 2.12
 138 - 1.38 250 - 2.50

COVER TYPE _____
 0 - Standard flush
 1 - Extended

YOUR PRINT # _____

ADD FOR NICKEL PLATE _____

TO ORDER
 Select a case size from the RFT series, send a drawing and include: overall height, feedthru location, type (plain Teflon or filter) connector location etc. Our expertise in shielded cases can give you a truly CUSTOM design, limited only by your requirements.