

PRODUCT NUMBER

5 4 2 0 2 - X X X X X - X X X LF

PLATING

S=15μ"[0.38μm]GOLD
ON CONTACT AREA
100μ"[2.5μm]TIN
ON TAIL

G=30μ"[0.76μm]GOLD
ON CONTACT AREA
100μ"[2.5μm]TIN
ON TAIL

T=100μ"[2.5μm]TIN
ON CONTACT AREA
AND ON TAIL(SEE NOTE 11, 15)

F=2μ"[0.05μm]GOLD
ON CONTACT AREA
AND ON TAIL

LEAD FREE OPTION NOTE 9 & 10

POLARIZATION
NOTE 6

PACKAGING TYPE, NOTE 5

POSITIONS PER ROW
02 TO 20


LEAD STYLE	POST
08	0.230/5.84
30	0.318/8.08

NOTES:

- ① HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC.
FLAME RETARDANT PER UL 94V-0
COLOR: BLACK
OR
MINERAL FILLED LCP FLAME RETARDENT
PER UL-94V-0. COLOR: BLACK.

THESE PART NUMBERS WILL WITHSTAND EXPOSURE
TO 260 C PEAK TEMPERATURE FOR 20 SECONDS IN
WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.



- ② PIN MATERIAL: PHOSPHOR-BRONZE
- ③ TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS ROW.
EXAMPLE: 10 POS., N x .100/2.54=1.00/25.4
- ④ 2LBS/0.9KG MIN. PIN RETENTION IN EITHER DIRECTION.
- ⑤ PACKAGING: _ =POLY BAGS WITHOUT PICKUP CAP.
T =TUBES (OMIT DASH IF NOT POLARIZED).
P =TUBES WITH PICKUP CAPS.
A =TAPE AND REEL WITH PICKUP CAPS.
- ⑥ FOR POLARIZATION, SPECIFY POSITION NUMBER
(i.e. A03=ROW A POS. 3) TO OMIT PIN.
OMIT FROM PRODUCT NUMBER IF THIS FEATURE IS NOT APPLICABLE.
PRODUCT MANAGEMENT APPROVAL REQUIRED PRIOR TO RELEASE
OR SALE OF POLARIZED PRODUCTS.
7. UNDERPLATING: 50μ"/1.2μm Ni.
8. PIN TIPS ON Sn PLATED PRODUCT MAY HAVE BARE METAL ON TWO SIDES,
BOTH ENDS.
- ⑨ PART NUMBERS WITH "LF" SUFFIX AT THE END ARE LEAD FREE.
- ⑩ THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- ⑪ "THIS PRODUCT HAS 100% PURE TIN PLATING IN THE INTERFACE AND
HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT
ENVIRONMENTS."
12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

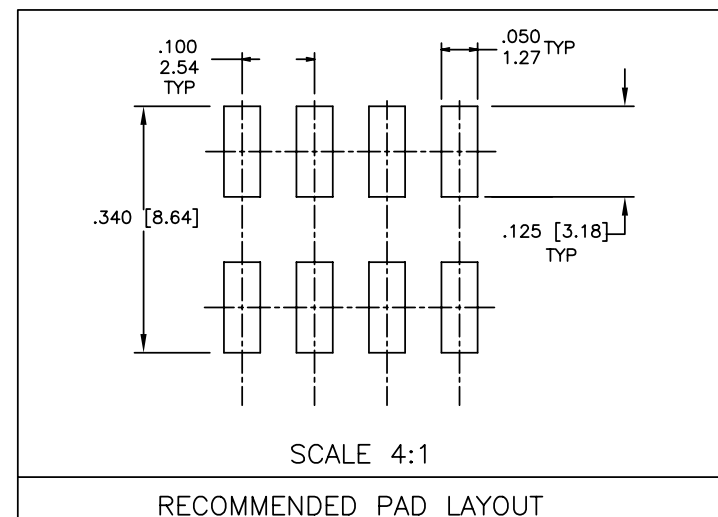

www.fciconnect.com			surface 6.4 ISO 1302	tolerance std ISO 406 ISO 1101	projection A4	INCH/MM
Dr	D.INGRAM	05/17/99	ANGULAR LINEAR	0.X	±0.3	size
Eng	H.SUNDY	07/21/99		0.XX	±0.15	Scale
Chr	H.SUNDY	07/21/99		0.XXX	±0.05	1.000
Appr	H.SUNDY	07/21/99	Product family	BERGSTIK	ECN	N10-0438
title			.100 UNSHROUDED HDR. DUAL ROW VERT. SMT.			Rev.
catalog no			CUSTOMER			sheet 1 of 3

rev	ecn no	dr	date
N	M06-0268	MHT	7/17/06
P	M06-0435	MHT	10/31/06
R	M07-0092	MHT	2/07/07
S	M07-0361	MHT	8/14/07
T	M08-0208	MHT	7/18/08
U	M08-0279	MHT	9/30/08
V	N10-0438	ZJ	2010-12-28

PRODUCT NUMBER
SEE TABLE

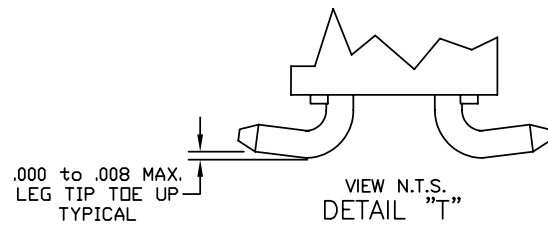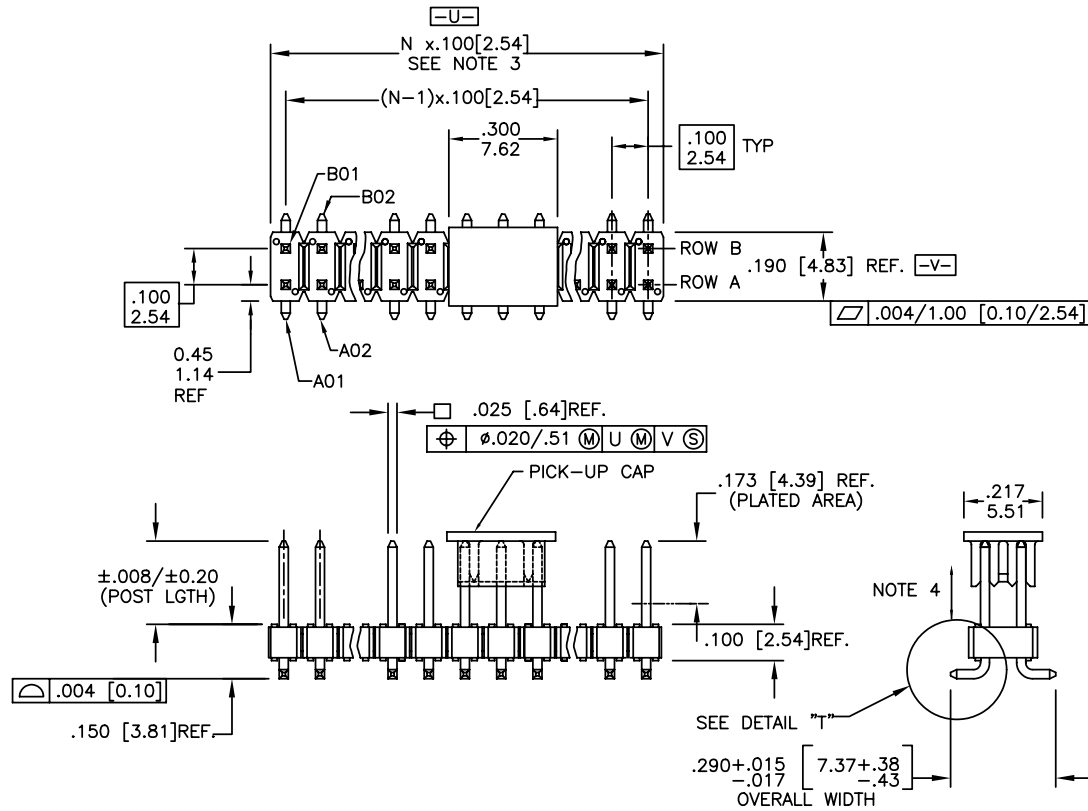

www.fciconnect.com			surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection A4	INCH/MM
TOLERANCES UNLESS OTHERWISE SPECIFIED			ANGULAR	LINEAR	size	Scale
Dr	D.INGRAM	05/17/99	0°	±2°	0.X	±0.3
Eng	H.SUNDY	07/21/99	0°	±2°	0.XX	±0.15
Chr	H.SUNDY	07/21/99	0°	±2°	0.XXX	±0.05
Appr	H.SUNDY	07/21/99	Product family		BERGSTIK	Spec ref
title			.100 UNSHROUDED HDR. DUAL ROW VERT. SMT.			Rev.
catalog no			CUSTOMER			sheet 2 of 3

TAPE AND REEL PACKAGING

A

B

C


D

SIZE	LEAD STYLE 08 POST (0.230 [5.84])	LEAD STYLE 30 POST (0.318 [8.08])
2X2	YES	
2X3	YES	
2X4	YES	YES
2X5	YES	
2X6	YES	
2X7	YES	YES
2X8	YES	
2X9		
2X10	YES	
2X11	YES	
2X12		YES
2X13	YES	
2X14		
2X15	YES	
2X16		YES
2X17	YES	
2X18		
2X19		
2X20		

Cross Reference

CORE RANGE	EXTENDED RANGE
54202-X08XXLF	95278-X01-XXLF
54202-X30XXLF	95278-X02-XXLF

TAPE AND REEL PACKAGING

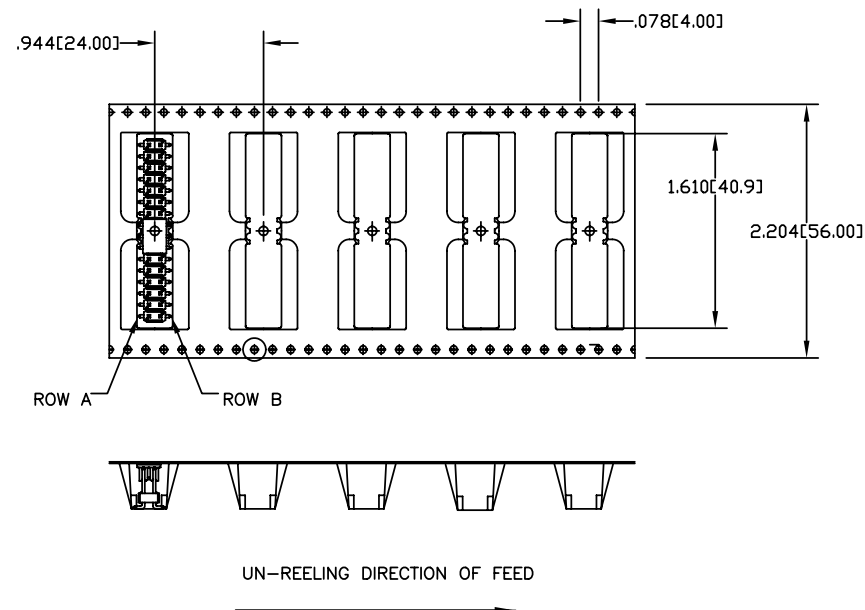

A

B

C

D

www.fciconnect.com			surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection A4	INCH/MM
TOLERANCES UNLESS OTHERWISE SPECIFIED			ANGULAR	LINEAR	size	Scale
Dr	D.INGRAM	05/17/99	0°	±2°	0.X	±0.3
Eng	H.SUNDY	07/21/99	0°	±2°	0.XX	±0.15
Chr	H.SUNDY	07/21/99	0°	±2°	0.XXX	±0.05
Appr	H.SUNDY	07/21/99	Product family		BERGSTIK	Spec ref
FCI			title		dwg no	Rev.
			.100 UNSHROUDED HDR. DUAL ROW VERT. SMT.		54202	V
catalog no			CUSTOMER		sheet 3 of 3	