



4-40 THREAD



MATERIAL:
.062 (1.57) thick Steel,
Zinc Plate

CAT. NO. 612


4-40 THREAD



MATERIAL:
.062 (1.57) thick Steel,
Zinc Plate

CAT. NO. 621


4-40 THREAD



MATERIAL:
.047 (1.19) thick Brass,
Tin Plate

CAT. NO. 616


6-32 THREAD



MATERIAL:
.032 (.81) thick Brass,
Nickel Plate

CAT. NO. 634


6-32 THREAD



MATERIAL:
.032 (.81) thick Brass,
Tin Plate

CAT. NO. 614


6-32 THREAD



MATERIAL:
.032 (.81) thick Brass,
Tin Plate

CAT. NO. 630


6-32 THREAD



MATERIAL:
.062 (1.57) thick Steel,
Nickel Plate

CAT. NO. 4334


6-32 THREAD



MATERIAL:
.062 (1.57) thick Steel,
Nickel Plate

CAT. NO. 708


6-32 THREAD



MATERIAL:
.062 (1.57) thick Steel,
Tin Plate

CAT. NO. 617


6-32 or 8-32 THREAD



MATERIAL:
.062 (1.57) thick Brass,
Nickel Plate

CAT. NO.	THREAD
4332	6-32
4333	8-32


8-32 THREAD



MATERIAL:
.037 (.94) thick Brass,
Tin Plate



CAT. NO. 611

8-32 THREAD



MATERIAL:
.037 (.94) thick Steel,
Tin Plate

CAT. NO. 631

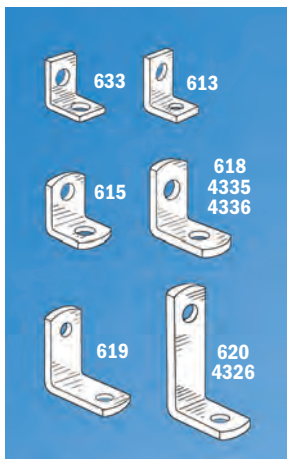

CAT. NO.	A	B	C	D	D HOLE DIAMETER	E	E HOLE DIAMETER	T MATERIAL	FINISH
633	.375 (9.5)	.375 (9.5)	.281 (7.1)	.218 (5.5)	.140 (3.6)	.218 (5.5)	.140 (3.6)	.032 (.81) Brass	Nickel
613	.390 (9.9)	.453 (11.5)	.375 (9.5)	.234 (5.9)	.147 (3.7)	.299 (7.6)	.128 (3.3)	.032 (.81) Brass	Nickel
615	.420 (10.7)	.343 (8.7)	.281 (7.1)	.281 (7.1)	.144 (3.7)	.203 (5.2)	.128 (3.3)	.032 (.81) Brass	Tin
4335	.562 (14.3)	.562 (14.3)	.500 (12.7)	.412 (10.5)	.120 (3.0)	.411 (10.4)	.120 (3.0)	.062 (1.57) Steel	Nickel
4336	.562 (14.3)	.562 (14.3)	.500 (12.7)	.412 (10.5)	.144 (3.7)	.412 (10.5)	.144 (3.7)	.062 (1.57) Steel	Nickel
618	.628 (16.0)	.628 (16.0)	.375 (9.5)	.378 (9.6)	.169 (4.3)	.378 (9.6)	.169 (4.3)	.050 (1.27) Brass	Tin
619	.687 (17.4)	.687 (17.4)	.375 (9.5)	.500 (12.7)	.144 (3.7)	.500 (12.7)	.144 (3.7)	.032 (.81) Steel	Tin
4326	1.013 (25.7)	.487 (12.4)	.312 (7.9)	.816 (20.7)	.140 (3.6)	.332 (8.4)	.140 (3.6)	.050 (1.27) Steel	Nickel
620	1.156 (29.4)	.656 (16.7)	.375 (9.5)	.906 (23.0)	.169 (4.3)	.420 (10.7)	.169 (4.3)	.032 (.81) Steel	Tin

BOARD BRACKETS



Originally designed for our line of standardized terminal boards; these brackets can also be used in other applications.

Choice of Steel or Aluminum

MATERIALS:

.062 (1.57) thick Steel, Nickel Plate
.062 (1.57) thick Aluminum


STEEL CAT. NO.	ALUMINUM CAT. NO.	W	L	S	For Use With Board No.'s (Refer to page 130)
1556	622	.375 (9.5)	1.625 (41.3)	1.000 (25.4)	15032 15072 15092
1567	623	.375 (9.5)	2.125 (54.0)	1.500 (38.1)	15033 15073 15093
1568	624	.375 (9.5)	2.625 (66.7)	2.000 (50.8)	15034 15074 15094
1569	625	.375 (9.5)	3.125 (79.4)	2.500 (63.5)	15035 15075 15095
1570	626	.281 (7.1)	1.187 (30.1)	.750 (19.1)	15022 15024 15030
1571	627	.281 (7.1)	1.625 (41.3)	1.187 (30.1)	15036 15076 15096

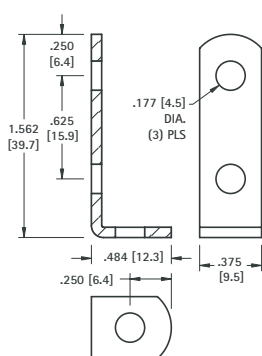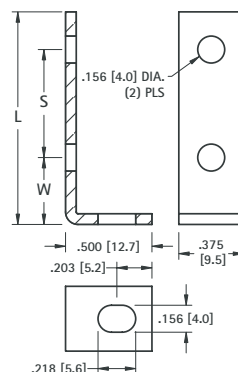

CAT. NO. 1564

MATERIAL:


.062 (1.57) thick Steel, Nickel Plate

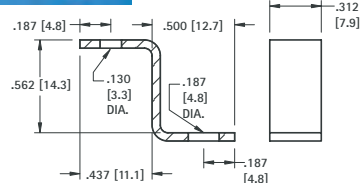

CAT. NO. 4325

MATERIAL:

.050 (1.27) thick Steel, Nickel Plate



CAT. NO. 4337

MATERIAL:

.080 (2.03) thick Aluminum

THREADED PC MOUNT BRACKETS

- Snaps in for wave soldering • Reduces assembly time • Easily mount into predrilled or punched holes • Stable no rock design




SNAP-IN PC MOUNT




For screw selection refer to pages 79 and 123

4-40 THREAD

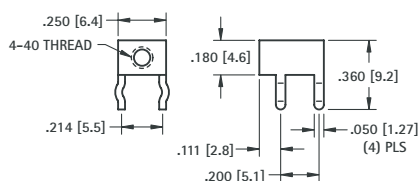

Mounting Detail




MATERIAL:


.032 (.81) thick Brass, Tin Plate

CAT. NO. 7774

6-32 THREAD

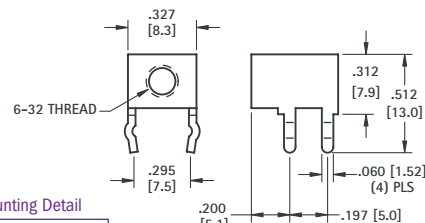

Mounting Detail



MATERIAL:

.032 (.81) thick Brass, Tin Plate

CAT. NO. 7779