


# Imaging and Deconvolution



Joshua Marvil, NRAO

21<sup>st</sup> Synthesis Imaging Workshop

28 May 2026



# Key Concepts

**Visibility** – a measurement of one Fourier component of the sky brightness distribution.

**Gridding** – combine all the measured visibilities onto a UV grid

**Imaging** – take the inverse Fourier transform of the gridded visibilities

**Point spread function** – a convolutional image feature due to incomplete UV sampling; the **‘dirty beam’**

**Deconvolution** – the removal of the PSF from the image; **‘cleaning’**

# Visibility $\leftrightarrow$ Sky relationship


An interferometer directly measures components of the Fourier transform of the intensity distribution

After several simplifying assumptions, we can relate our measurements to the sky brightness:

$$V_\nu(u, v) = \iint I_\nu(l, m) e^{-2\pi i(ul+vm)} dl dm$$

which can be directly inverted as:

$$I_\nu(l, m) = \iint V_\nu(u, v) e^{2\pi i(ul+vm)} du dv$$

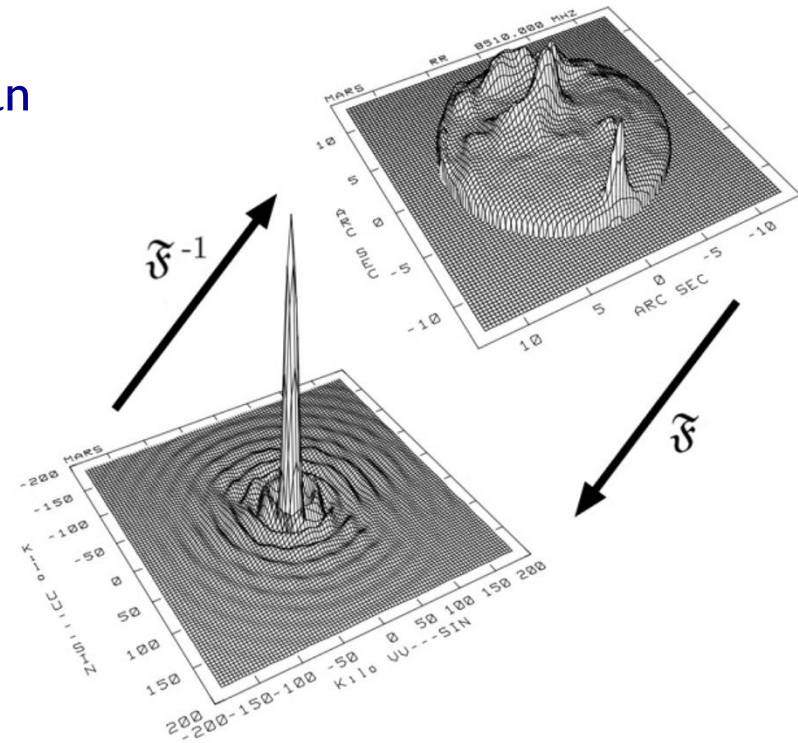


(adapted from from Taylor, Carilli, & Perley)


# Visibility $\leftrightarrow$ Sky relationship

Transmit–receive reciprocity in antenna theory:

a system can be treated either as a receiver or a transmitter and it will have the same directional gain pattern

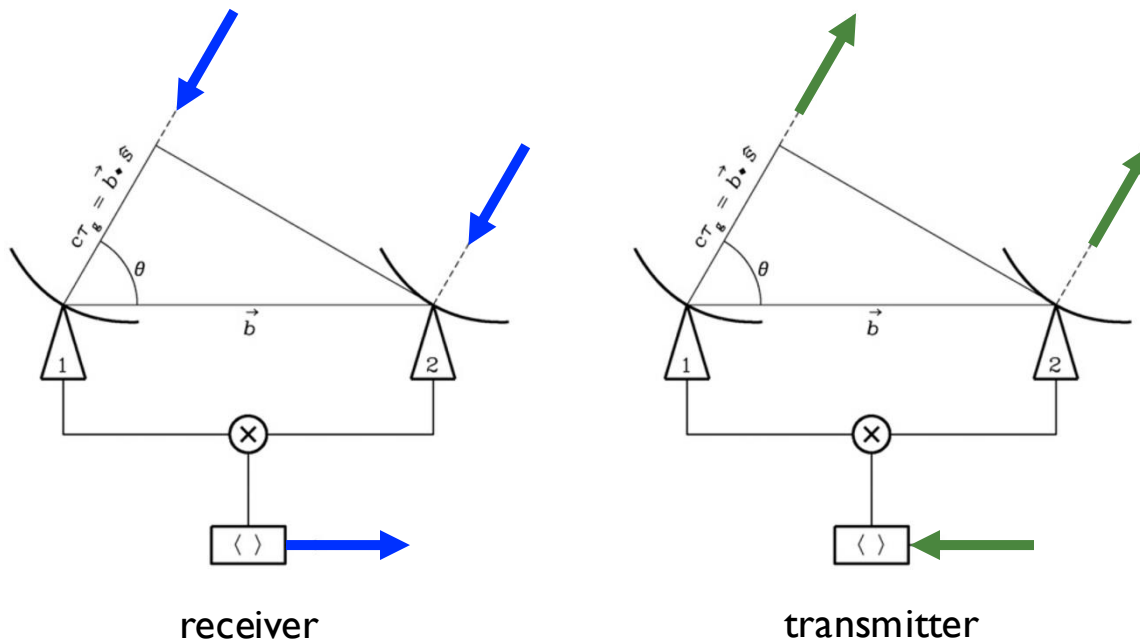

(Figure adapted from Condon & Ransom)




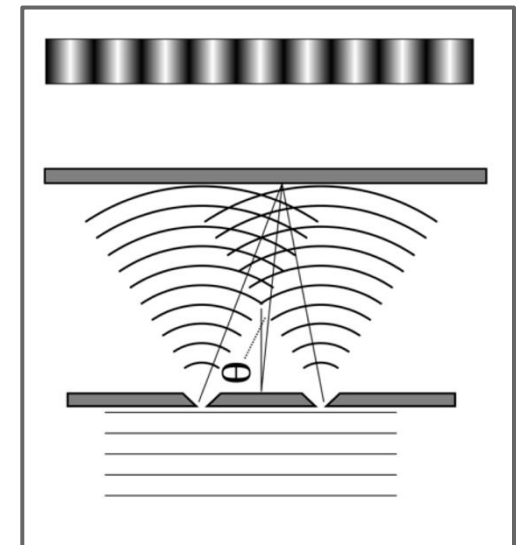


(Figure from wikipedia)

# Visibility $\leftrightarrow$ Sky relationship

each one of these fringes 'observes' the source

VLA:  
351 baselines  
1000+ channels  
every 2-5 seconds  
= 200M  
samples/hour

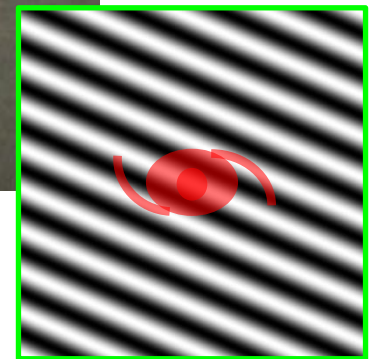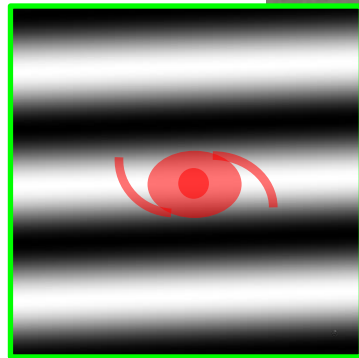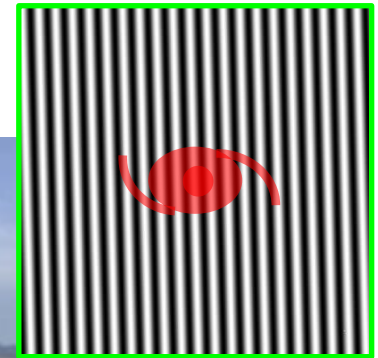
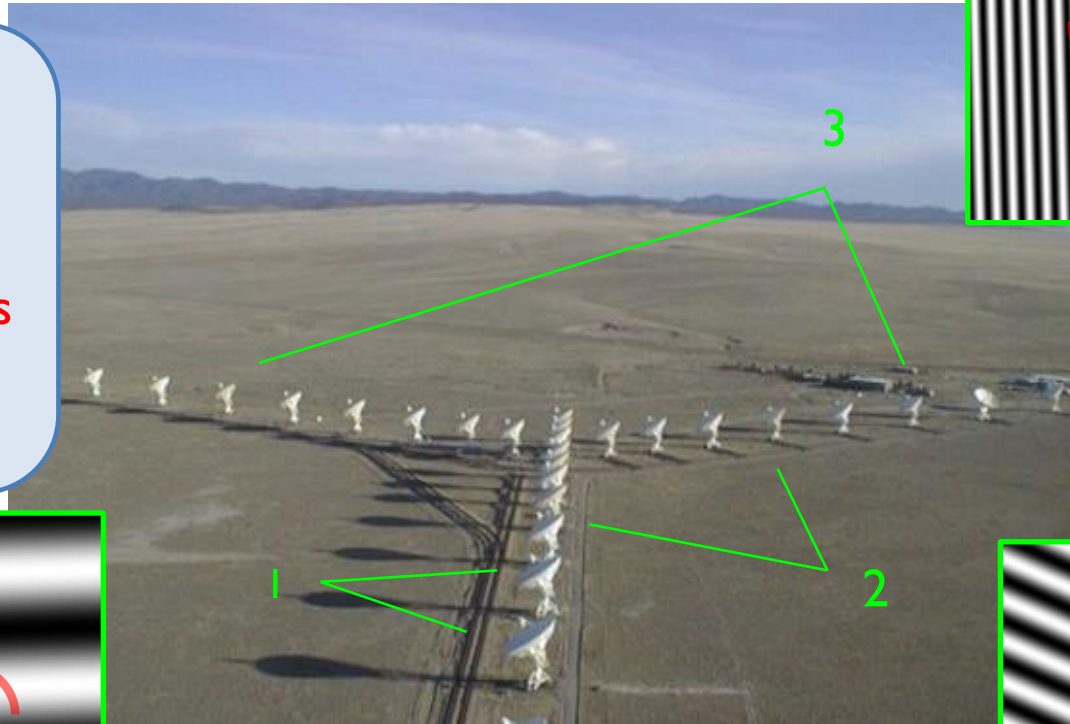


# Visibility $\leftrightarrow$ Sky relationship

If  $f(x)$  is real,  $F(s)$  is Hermitian:  $f(x) = f^*(-x)$

The sky is Real, so our Visibilities are Hermitian:

$\rightarrow$  **conjugate** visibilities

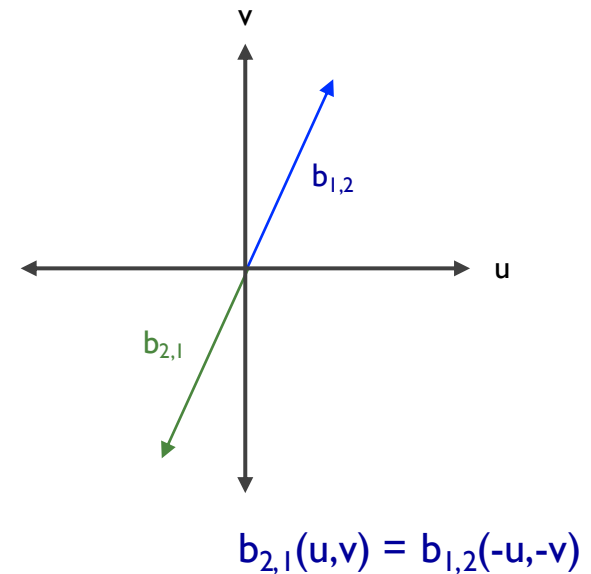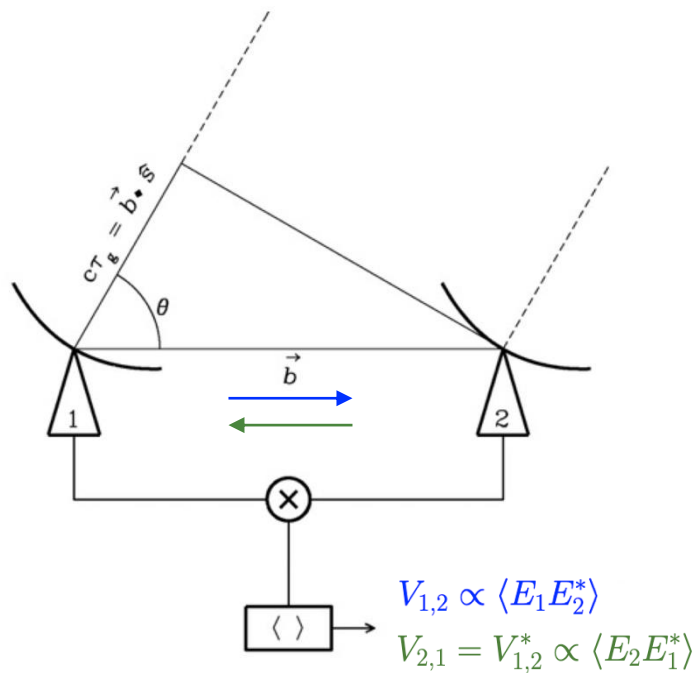

# Visibility $\leftrightarrow$ Sky relationship


**Earth rotation synthesis:** a baseline and its conjugate trace out elliptical arcs through the  $u$ - $v$  plane over time, based on its Earth-centric coordinates  $X_\lambda, Y_\lambda, Z_\lambda$ , the source's declination  $\delta$ , and the range of hour angles  $H$  observed

semi-major axis  $\sqrt{X_\lambda^2 + Y_\lambda^2}$




semi-minor axis  $\sin \delta_0 \sqrt{X_\lambda^2 + Y_\lambda^2}$

displacement along  $v$   $Z_\lambda \cos \delta_0$



$$\begin{bmatrix} u \\ v \\ w \end{bmatrix} = \begin{bmatrix} \sin H & \cos H & 0 \\ -\sin \delta \cos H & \sin \delta \sin H & \cos \delta \\ \cos \delta \cos H & -\cos \delta \sin H & \sin \delta \end{bmatrix} \begin{bmatrix} X_\lambda \\ Y_\lambda \\ Z_\lambda \end{bmatrix}$$

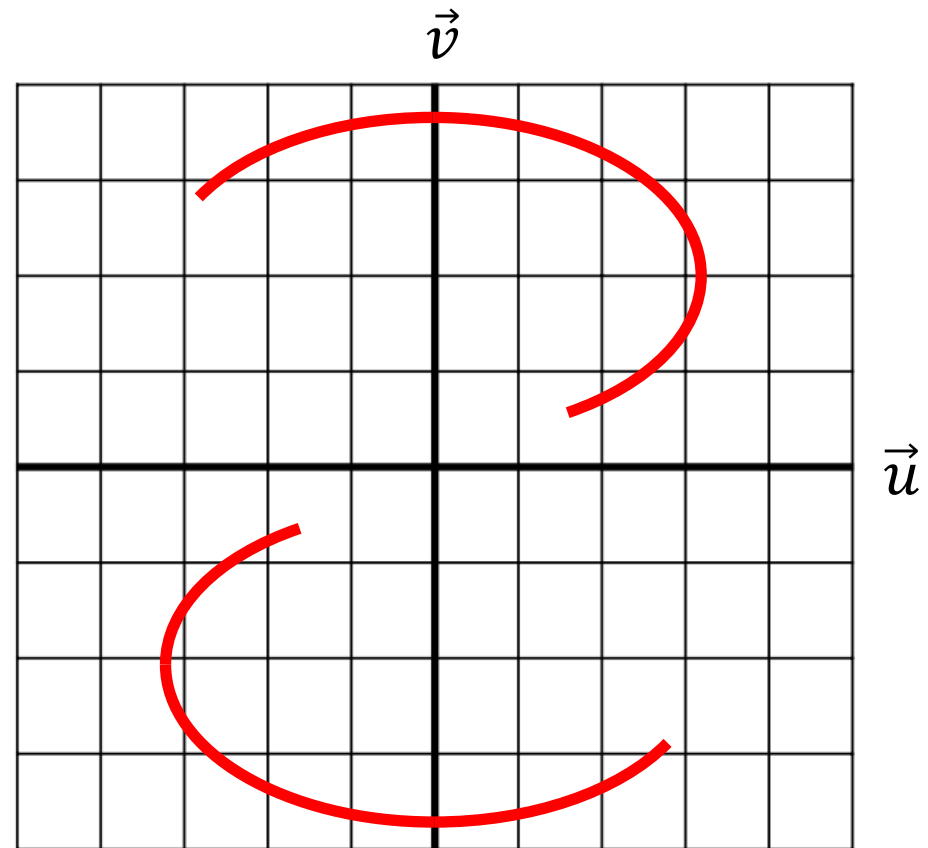

# Visibility $\leftrightarrow$ Sky relationship

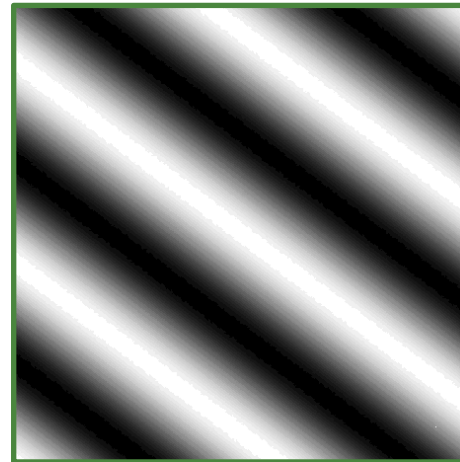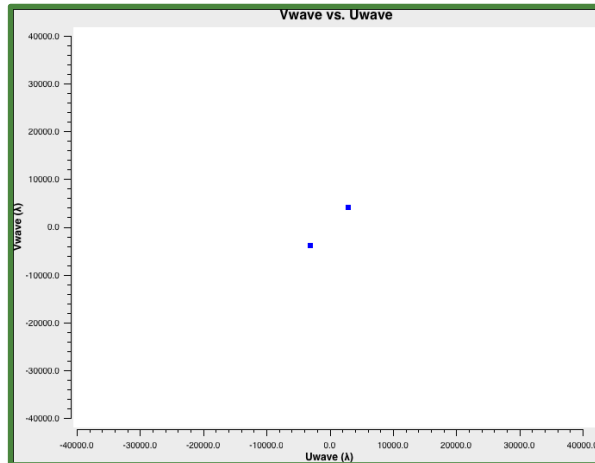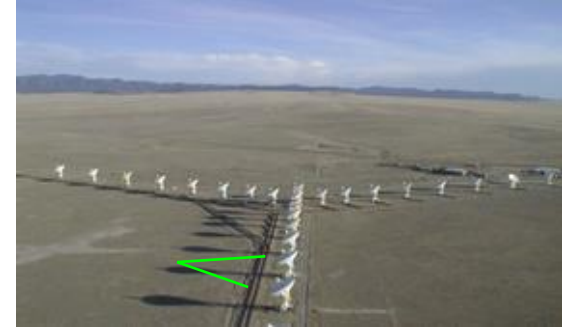

Snapshot

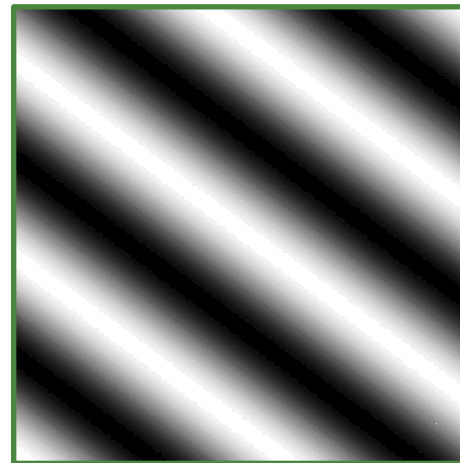
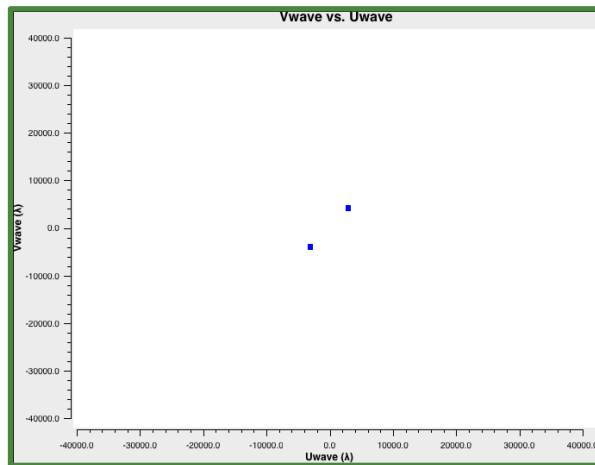


Cumulative



Synthesized aperture

Synthesized beam

# Visibility $\leftrightarrow$ Sky relationship

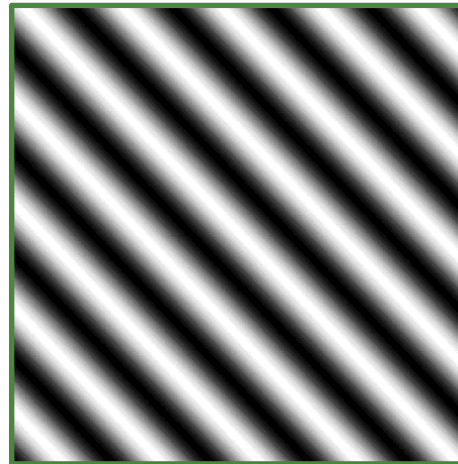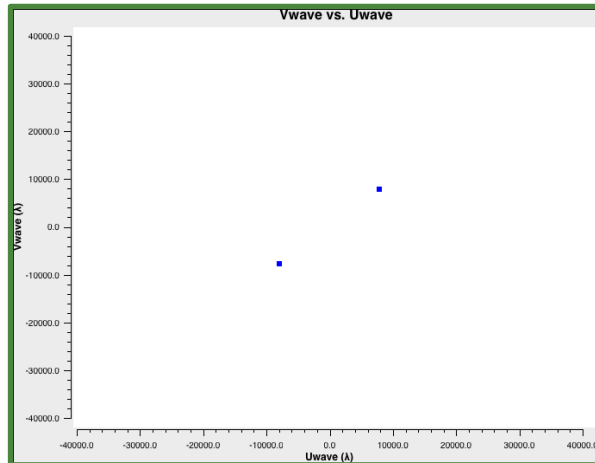

Snapshot

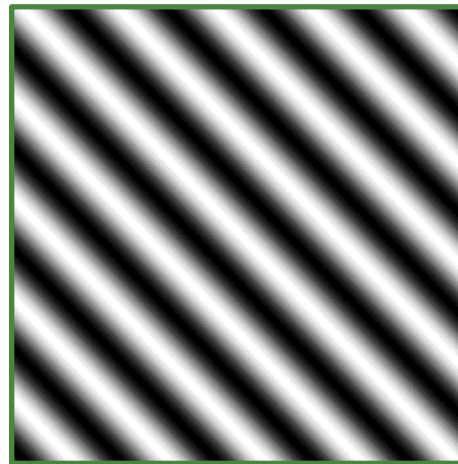
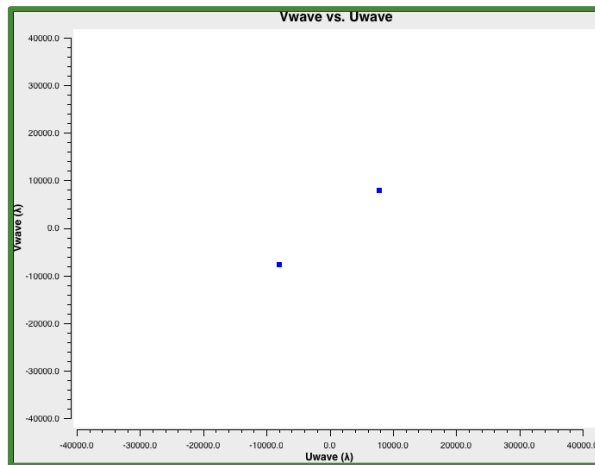


Cumulative


Synthesized aperture

Synthesized beam

# Visibility $\leftrightarrow$ Sky relationship

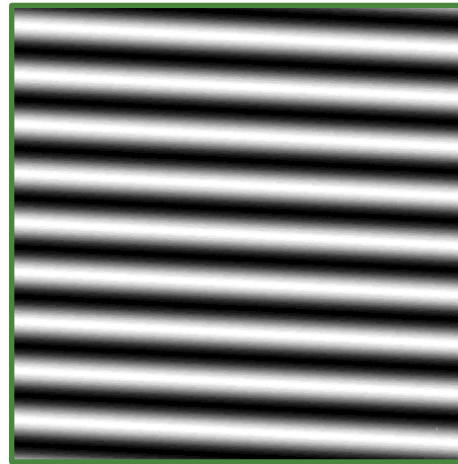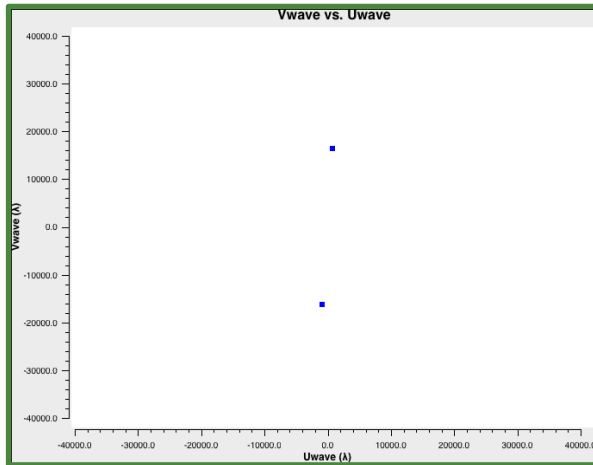

Snapshot


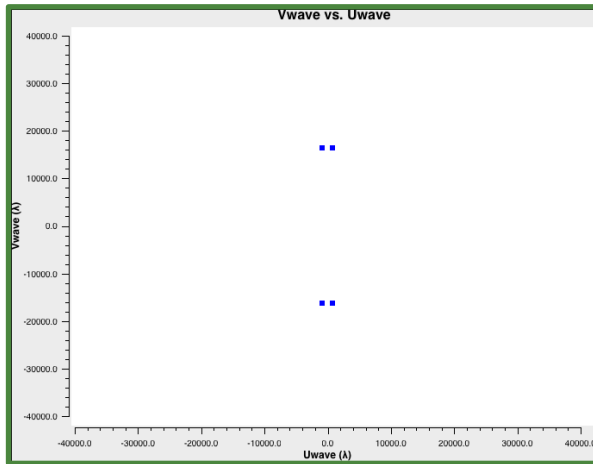


Cumulative



Synthesized aperture

Synthesized beam

# Visibility $\leftrightarrow$ Sky relationship

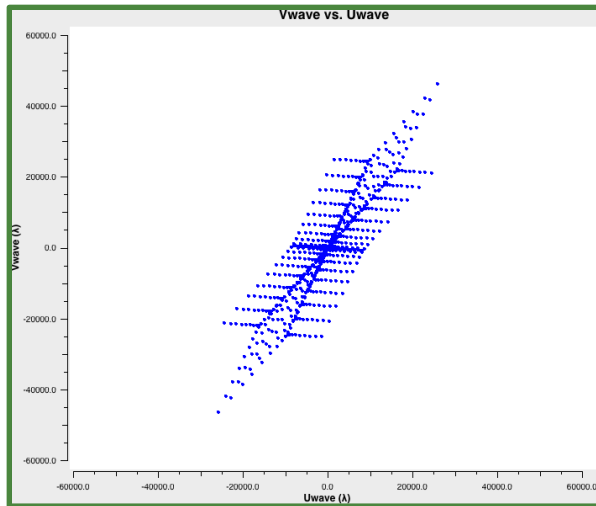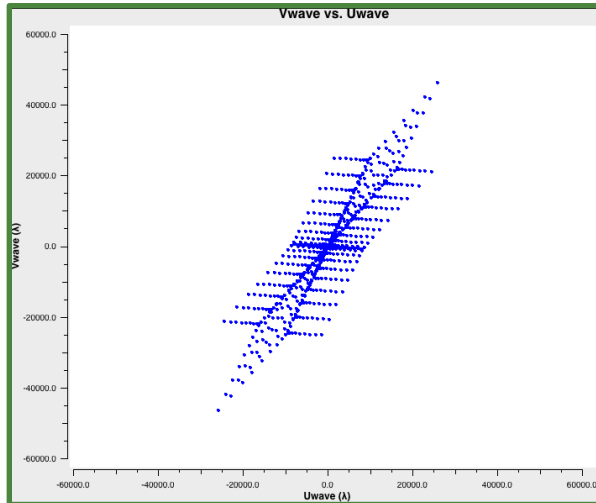

Synthesized aperture

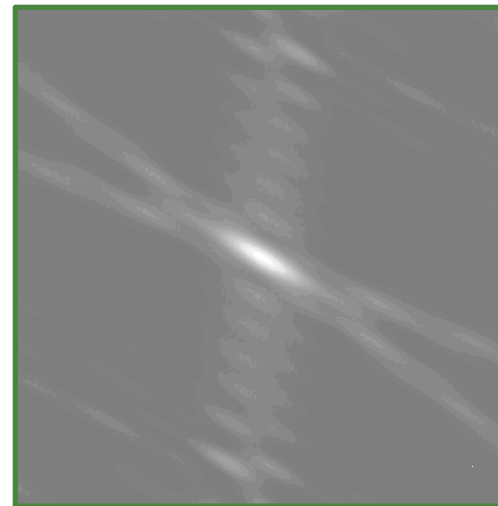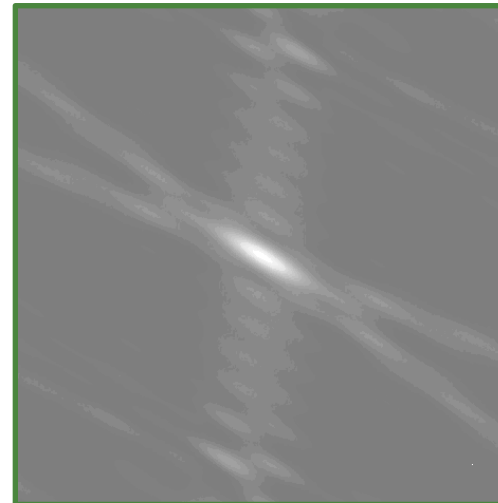

Synthesized beam

Snapshot

Cumulative

# Table of visibilities

Essential columns:

- **b** in wavelengths or meters
- calibrated **V** in Janskys =  $10^{-26} \text{Wm}^{-2}\text{Hz}^{-1}$
- frequency, phase-tracking center

Other columns:

- data weight, flags
- timestamps, intervals
- antenna & receiver IDs

many, many rows

b (u, v, w)	V (x+iy)	direction	frequency	...

Ancillary tables: antenna pointing, weather, system calibration

# Imaging with the Fourier transform

Performance considerations for  $M$  visibilities,  $N \times N$  image size:

- Direct Fourier Transform:  $O(M \cdot N^2)$
  - Discrete Fourier Transform:  $O(N^4)$
  - Fast Fourier Transform:  $O(N^2 \log_2 N)$
- } require regular grid


Typical sizes:  $M \sim 10^6-10^7$ ;  $N \sim 10^2-4^+$

Typical runtimes: Discrete  $\sim$  days; FFT  $\sim$  minutes

# Gridding

Practical to think first about the image grid:

- predict your angular resolution from diffraction:  $\theta_{\text{syn}} \approx \frac{\lambda}{b_{\text{max}}}$  (radians)
- choose an image cell size  $\Delta l$  that oversamples  $\theta_{\text{syn}}$  by a factor of 4~5
- choose an image size MxN (pixels) based on your desired field of view (FOV)
- FOV will be  $M \Delta l \times N \Delta m$
- typically want  $\Delta l = \Delta m$ ,  $M = N$

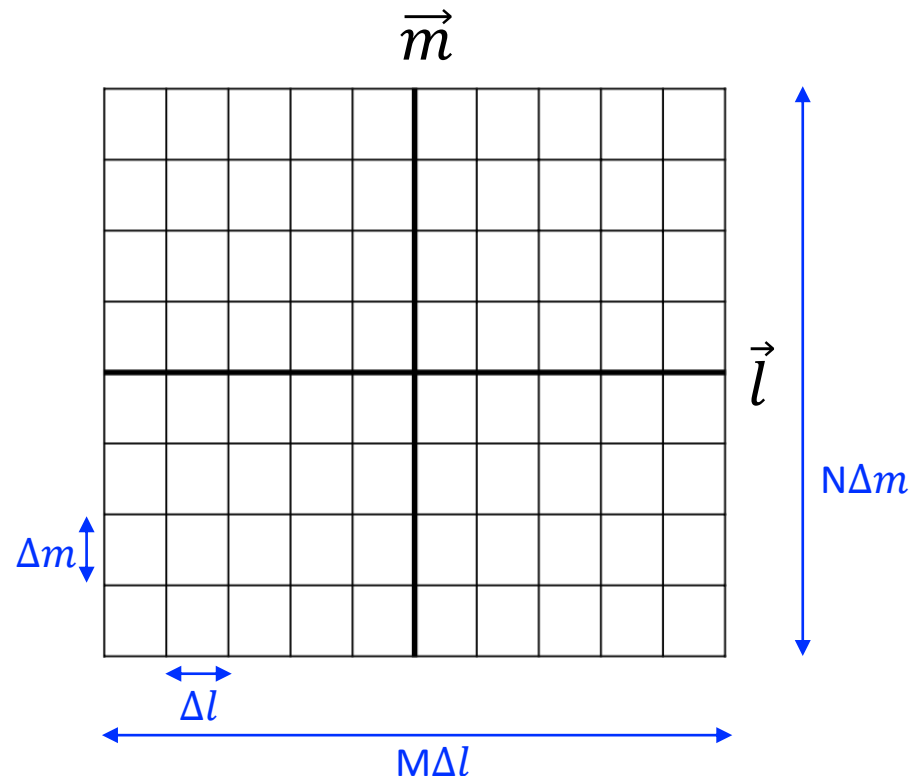


# Gridding

UV grid properties will be determined from the image grid

- the number of UV grid cells (pixels) will be the same as what was chosen for the image size,  $M \times N$
- the UV cell size will be inversely proportional to the image FOV:

$$\Delta u = 1 / (M \Delta l)$$

$$\Delta v = 1 / (N \Delta m)$$

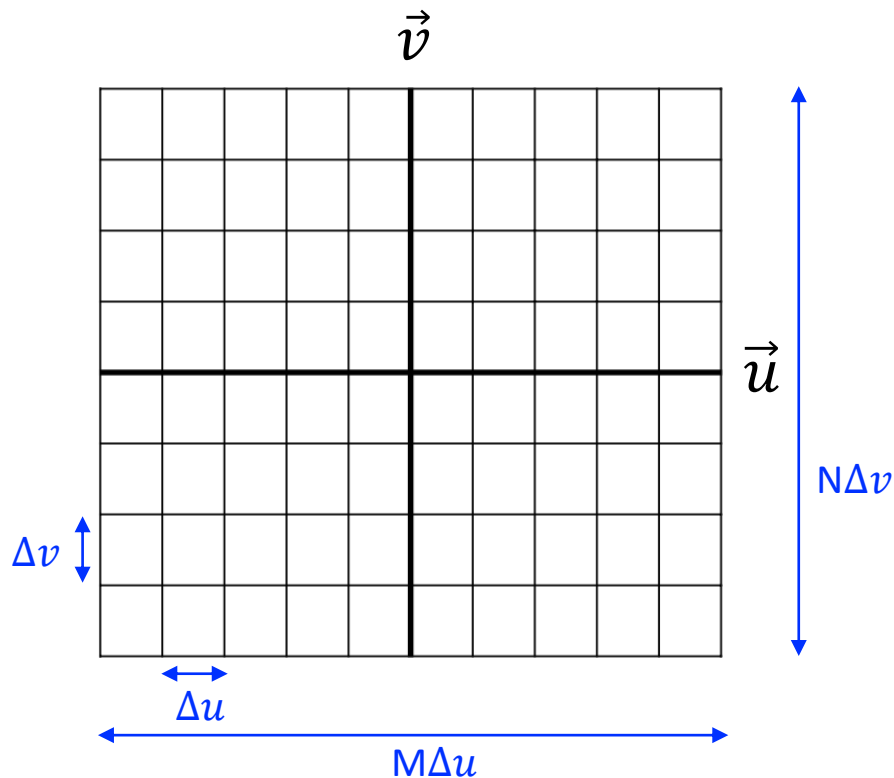


# Gridding

Visibilities are averaged in the correlator and written out as discrete samples

The correlator integration times are often 1 - 10 seconds

Measured visibilities will have values of  $u$  and  $v$  that do not align with grid cells, but the FFT requires a grid with regular spacing

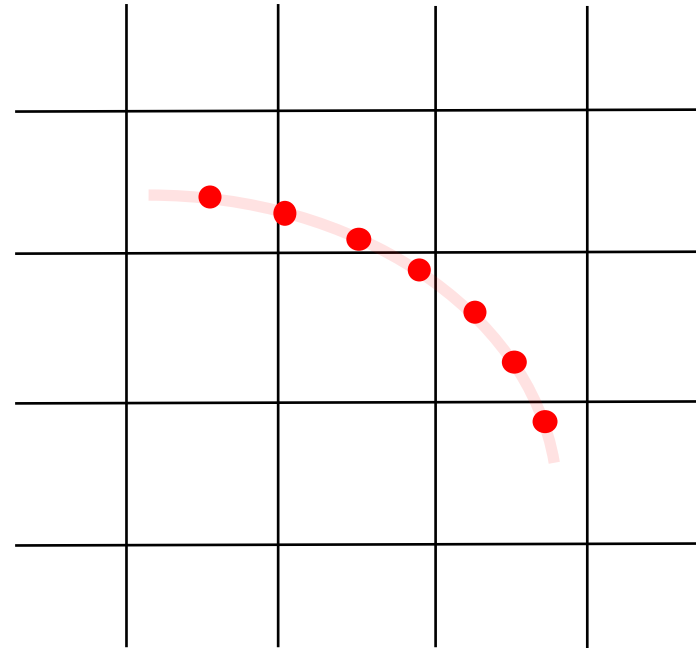

# Gridding

The most basic gridding process is called ***nearest neighbor***


Move each visibility to the center of the closest UV cell

If there is more than one visibility per cell then take the weighted average, using the ***data weights***

→ ***cell averaging***

Keep track of the sum of weights in each UV cell using a separate grid

→ ***gridded weights***

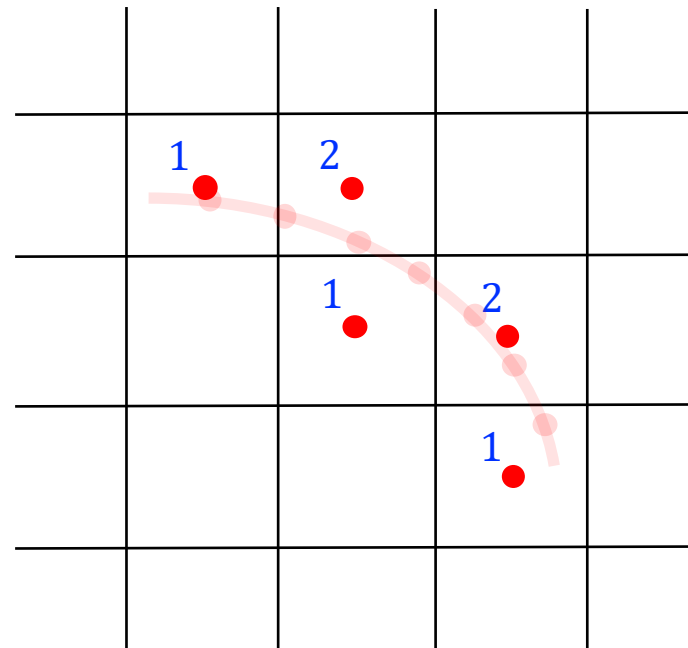

# Gridding


We can improve the gridding process through **convolutional resampling**

Each visibility is convolved by a **gridding kernel** that distributes the visibility across multiple cells

We can oversample the kernel to reduce interpolation errors

Specific kernels can address other issues including:

- aliasing
- w-term
- mosaicking

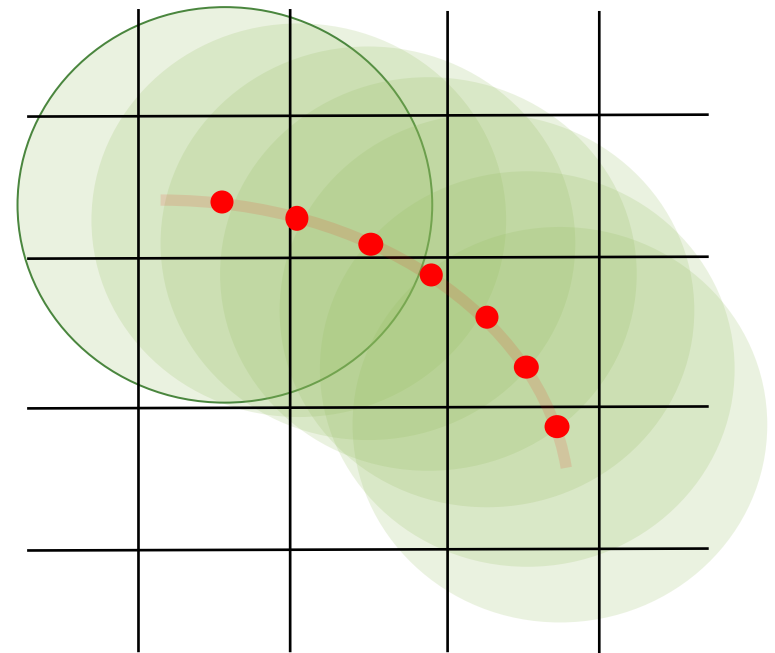

The effect of the kernel can be divided out in the image plane

# First Image of the Visibilities

The following equation requires that we know  $V(u, v)$  at all values of  $u, v$

$$I_\nu(l, m) = \iint V_\nu(u, v) e^{2\pi i(ul+vm)} du dv$$

but we know that our UV coverage is incomplete. So we add a new **sampling function** term  $S(u, v)$

$$I_\nu^D(l, m) = \iint V_\nu(u, v) S(u, v) e^{2\pi i(ul+vm)} du dv$$

where

$$S(u, v) = \sum_{k=1}^M \delta(u - u_k, v - v_k)$$

$M$ : # of visibility measurements

# First Image of the Visibilities

from the multiplication property of the Fourier transform, we can equate

$$I_{\nu}^D(l, m) = \iint V_{\nu}(u, v) S(u, v) e^{2\pi i(ul+vm)} du dv$$

with

$$\begin{aligned} I_{\nu}^D(l, m) &= \mathcal{F}^{-1}[V_{\nu}(u, v)] * \mathcal{F}^{-1}[S_{\nu}(u, v)] \\ &= I_{\nu}(l, m) * B_{\nu}(l, m) \end{aligned}$$


we call  $I^D(l, m)$  the **dirty image** and  $B(l, m)$  the **dirty beam**

Reversing this convolution to recover  $I(l, m)$  is called **deconvolution**

# First Image of the Visibilities

Example dirty image resulting from the convolution of the sky model with the dirty beam. The dirty beam is also called the *point spread function*.

$$I_{\nu}^D(l, m) = I_{\nu}(l, m) * B(l, m)$$

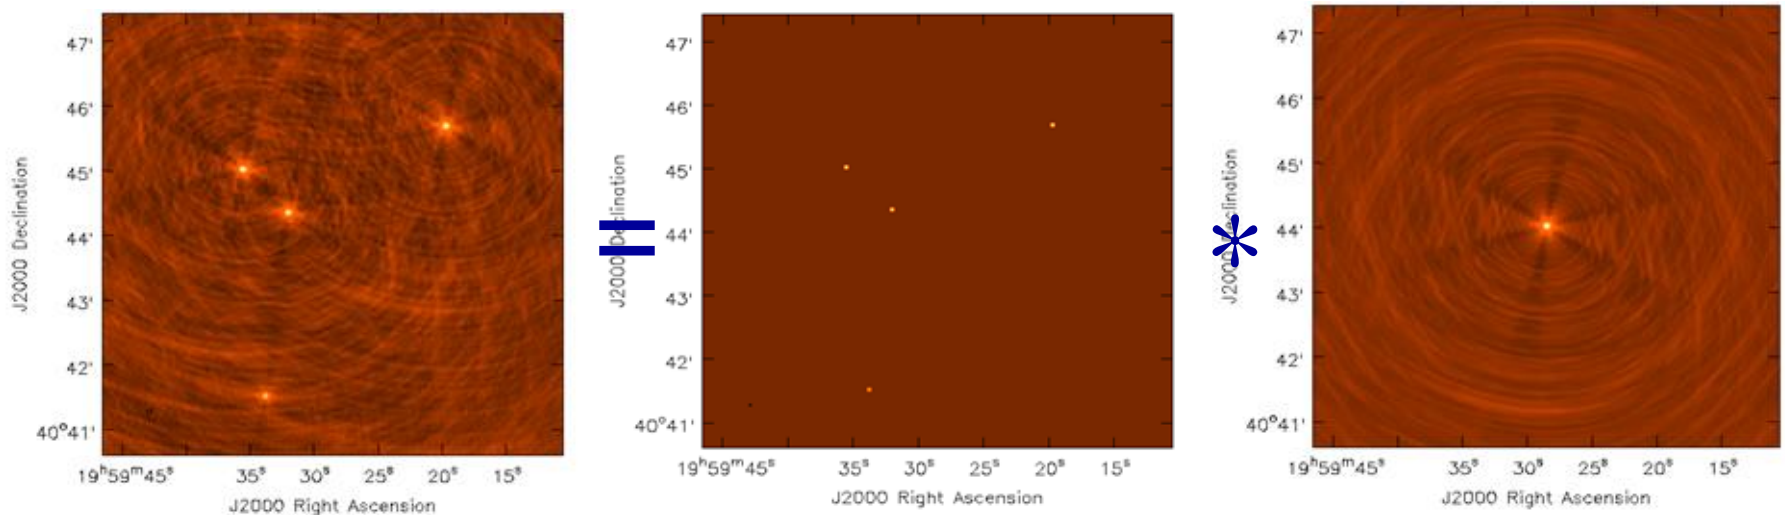

(Figure by U. Rao)

# The Point Spread Function (PSF)

The **PSF** is computed from the iFFT of the **gridded weights**. We define the '**clean beam**' as a Gaussian fit to the central peak of the PSF.

Properties of the PSF can be adjusted through manipulation of these weights, at the expense of image sensitivity:

**natural weighting:** no adjustments; optimal averaging

**uniform weighting:** constant weight per cell

**super-uniform weighting:** constant weight density

**robust (Briggs) weighting:** in between uniform and natural

**(outer) UV taper:** weight decreases with increasing UV-distance

# The Point Spread Function (PSF)

Natural

Bm : 5.6 arcsec  
0.1 sidelobe

Robust 0.7


Bm : 4.0 arcsec  
0.05 sidelobe

Uniform

Bm : 3.2 arcsec  
+0.03,-0.08 sidelobe

Tapered Uniform

Bm : 8.0 arcsec  
0.01 sidelobe

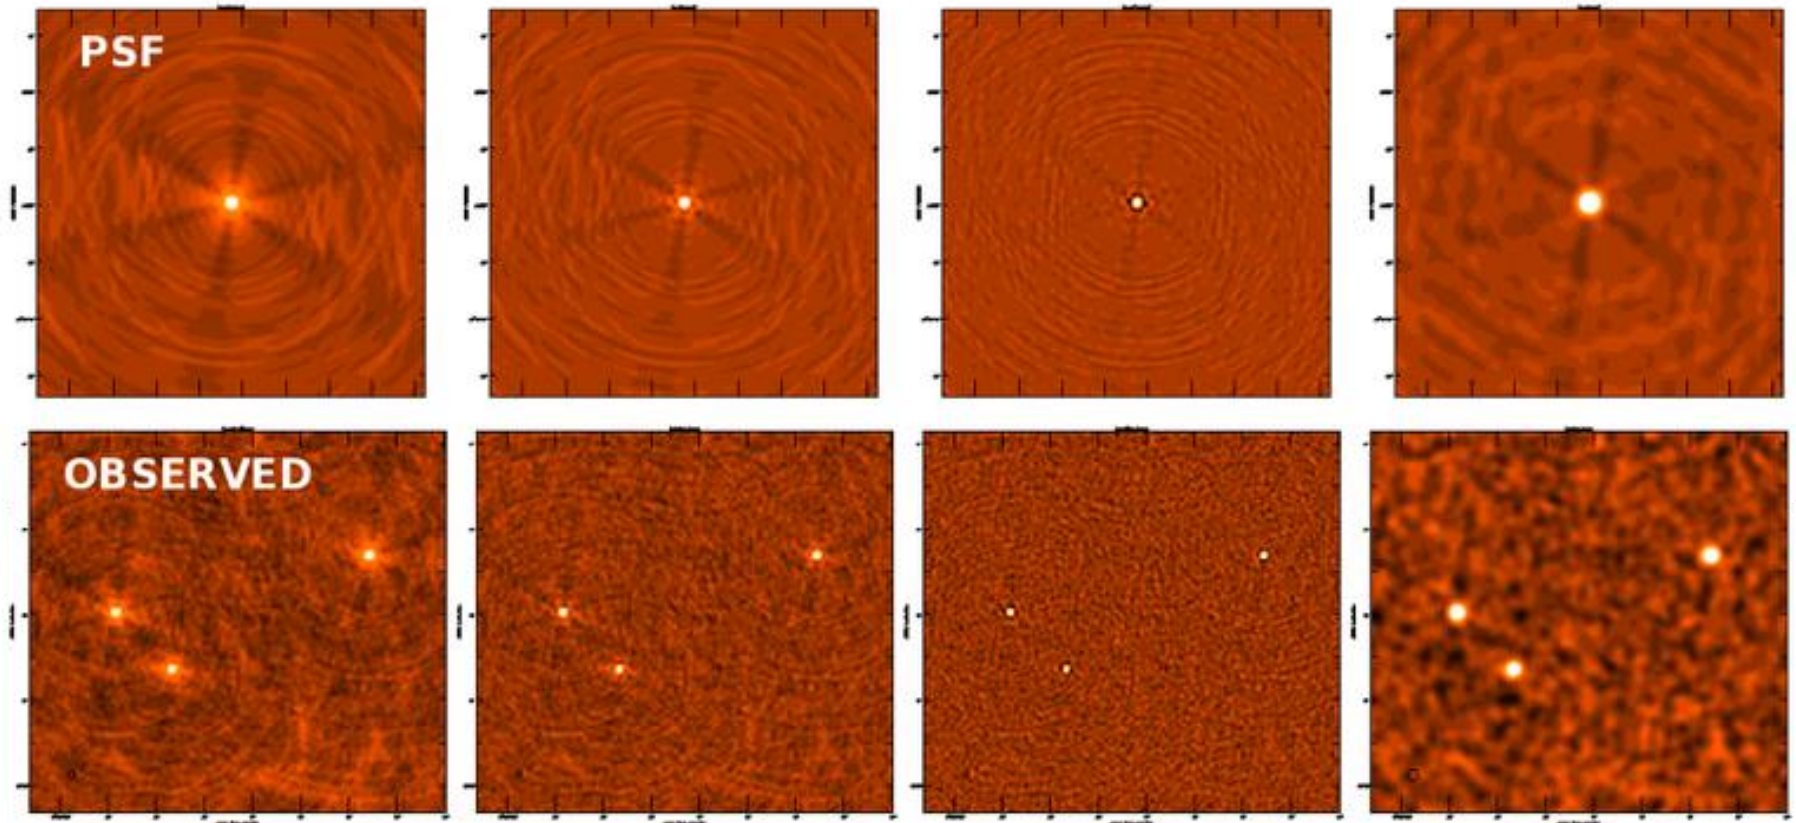

(Figure by U. Rao)

# Deconvolution

There is a formal, linear solution to the general problem of deconvolution, called the *principal solution*

$$I^{sky}(l, m) = F^{-1} \left[ \frac{F[I^{obs}(l, m)]}{F[I^{PSF}(l, m)]} \right]$$

The principal solution is equivalent to the uniformly weighted dirty image

Linear deconvolution can not fill in the unmeasured UV cells

The FT of these zero-weight cells treats them as having zero value

# Deconvolution

The FT of zero-weight cells treats them as having zero value, leading to spatial filtering

UV max due to the longest baseline

→ resolution limit, low-pass filter


UV min due to  $b_{\min} = D_{\text{antenna}}$

→ largest angular scale (LAS)

→ high-pass filter

Missing data in between samples:  
spatial frequencies that are missing  
from the dirty image

→ PSF structure

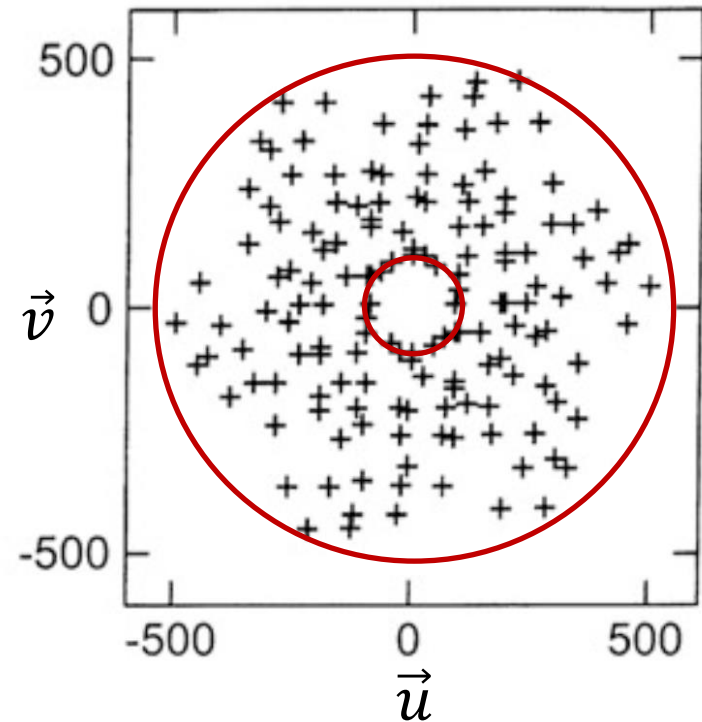

(Figure adapted from Thompson, Moran, & Swenson)

# Deconvolution

Deconvolution results can be improved with non-linear methods, e.g.


- Maximum Entropy
- Non-negative Least Squares
- Bayesian Inference
- CLEAN

These methods work by creating a model that is a good fit to the sampled visibilities. The FT of these models is not required to be zero at the location of unmeasured cells.


The final image is created from the **model image** without using any FTs. Therefore, only the residuals (data-model), which are hopefully noise-like with no remaining signal, are convolved by the dirty beam.

# Deconvolution


Simulated VLA example of 3 point sources

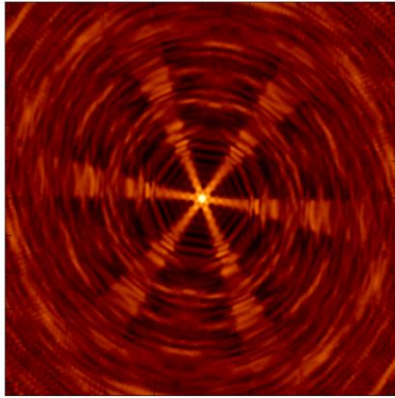


PSF

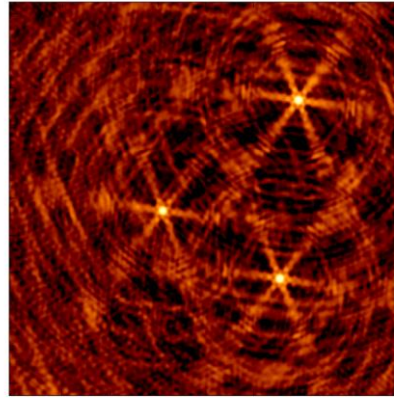


dirty image

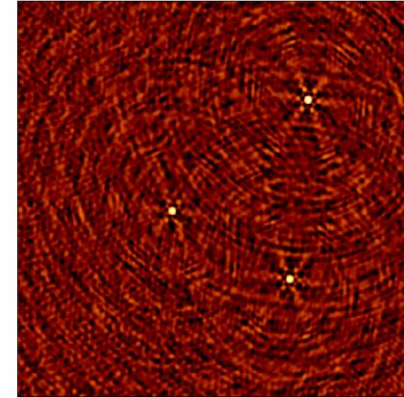


linear deconvolution



model

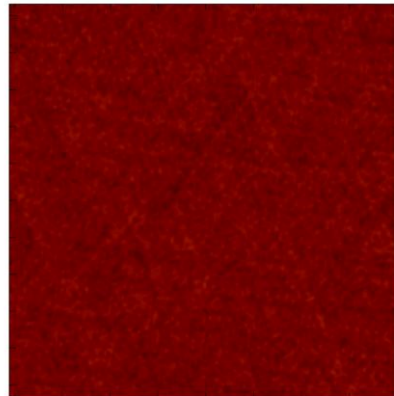

residual

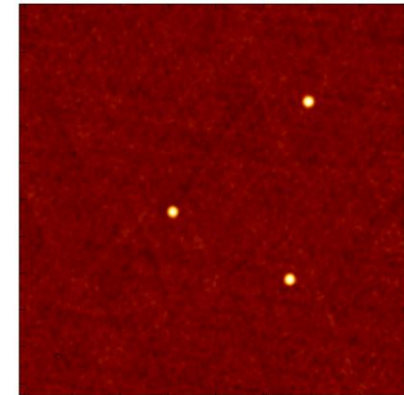

restored

# Deconvolution

The most basic CLEAN algorithm has the following phases:

Use the iFT to create the PSF and dirty image

Run the following loop until some stopping threshold is met:

Find the brightest peak  $P$  in the dirty image


Measure the position of the peak  $(x_p, y_p)$

Shift the PSF to  $(x_p, y_p)$ , multiply the PSF by loop gain  $\gamma$  times  $P$ , and subtract this from the dirty image

Add a point source with flux  $\gamma P$  to the model at  $(x_p, y_p)$

Smooth the model by a Gaussian *clean beam* having size  $\sim$  PSF

Add the *residual image* to the smoothed model

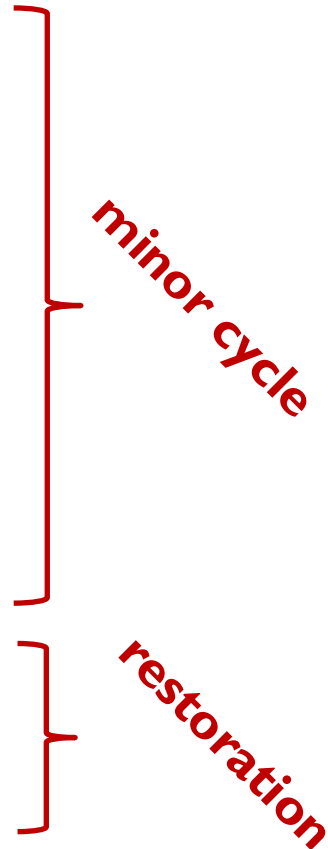


# Deconvolution

Simulated example from the Australian Telescope Compact Array


Model: 5 point sources and 1 Gaussian

Clean iterations:


1,5,10,20,50,100,200,500, 1000

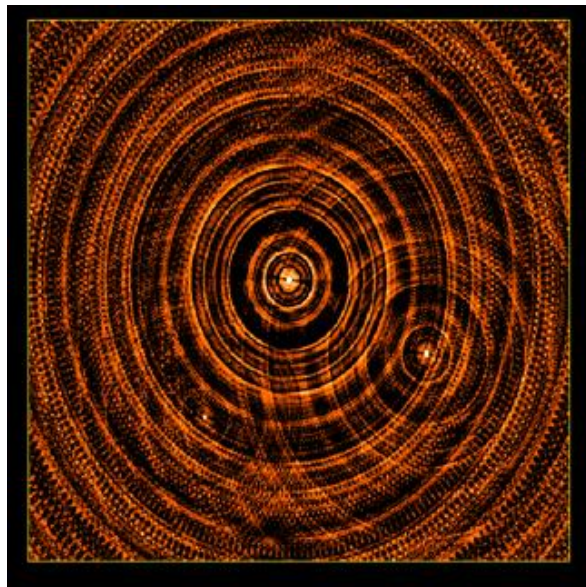

Dirty image

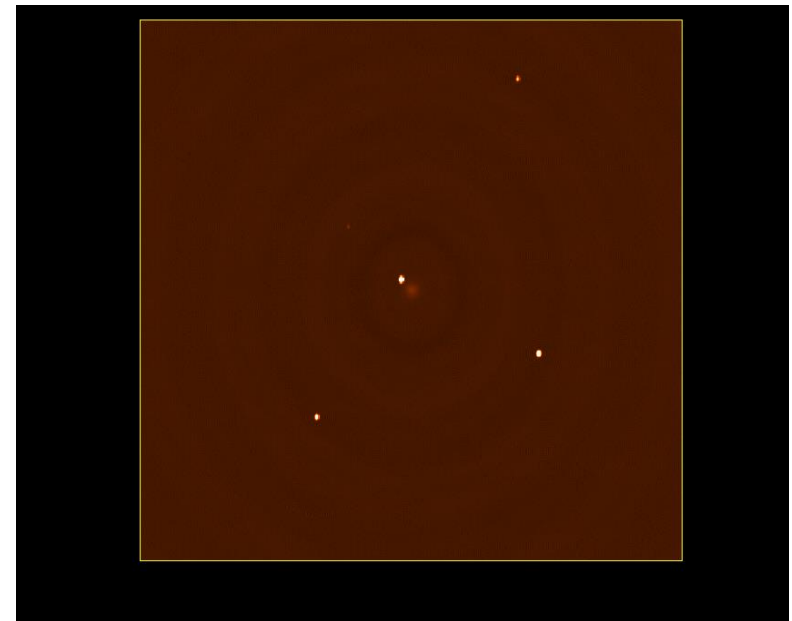

Restored

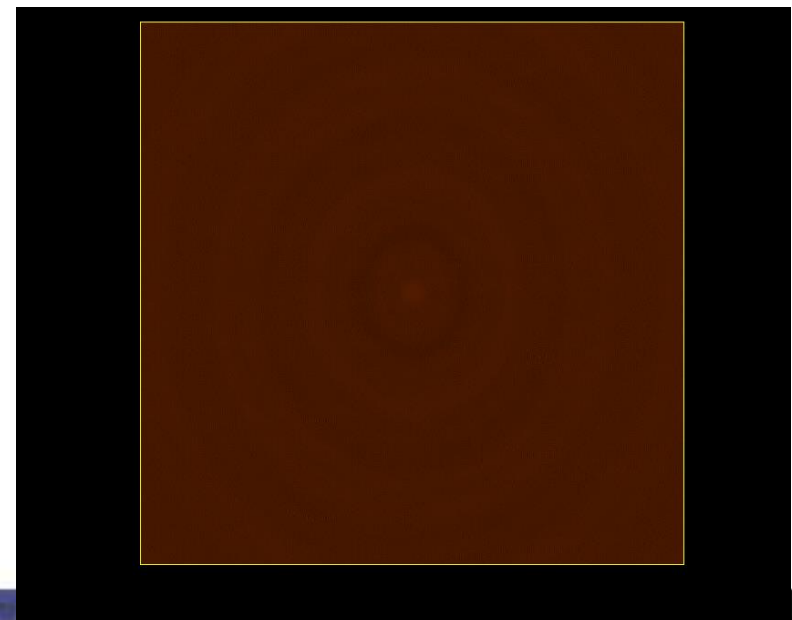

Residual

# Deconvolution

Variations of the CLEAN algorithm:

Major cycles: gridding, FTs, UV-subtraction

- Hogbom: only one cycle, large PSF
- Clark: many cycles, using the gridded data, PSF patch
- Cotton-Schwab: many cycles, using the measured data, PSF patch


Minor cycles: PSF subtraction, model building

- Hogbom: only point sources
- Multi-scale: point and a set of fixed paraboloids
- Adaptive Scale Pixel (ASP): point and a set of variable Gaussians


constrain the location of model components with *masks*

# Deconvolution


CLEAN

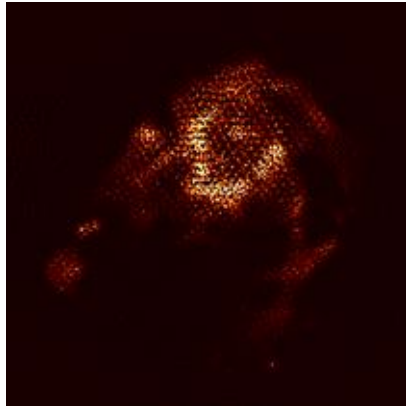


MEM

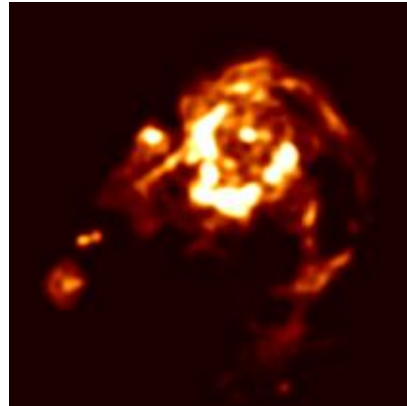





Multi-Scale

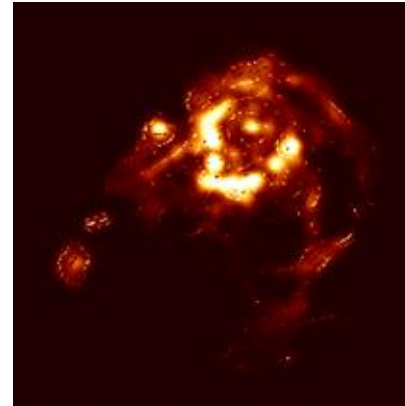

ASP

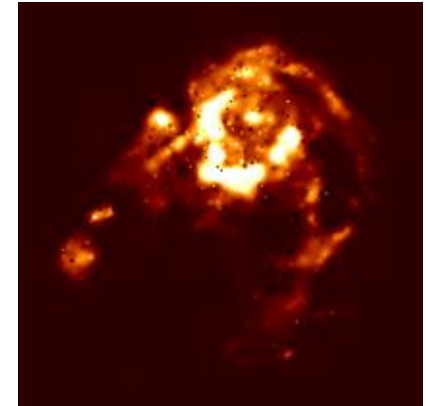

Model

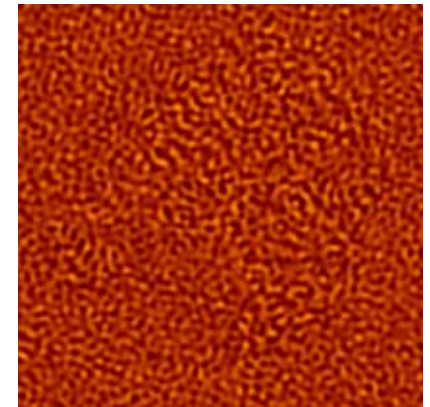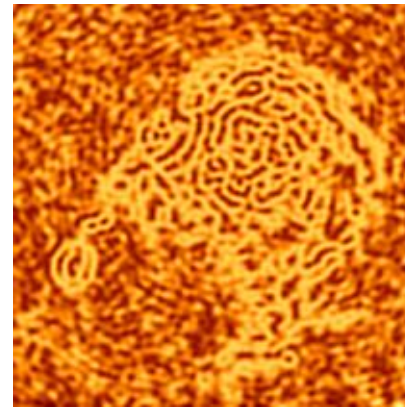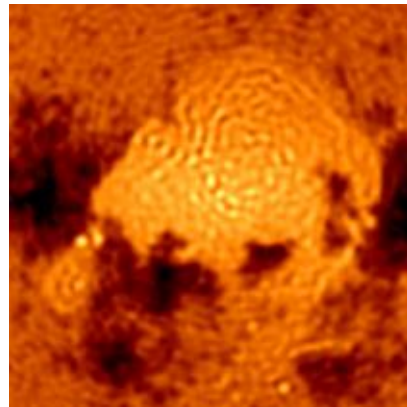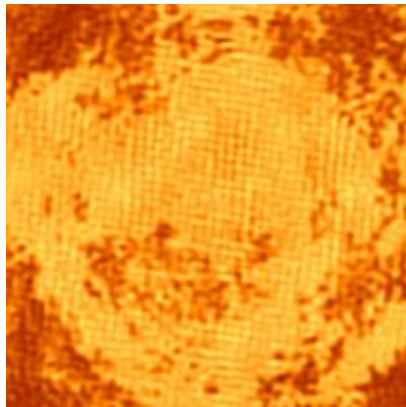

Residual

(Hogbom 1974, Clark 1980, Schwab & Cotton 1983 )

( Cornwell & Evans, 1985)


(Cornwell 2008)

(Bhatnagar & Cornwell 2004)


(figures from S. Bhatnagar)

# Deconvolution


CLEAN

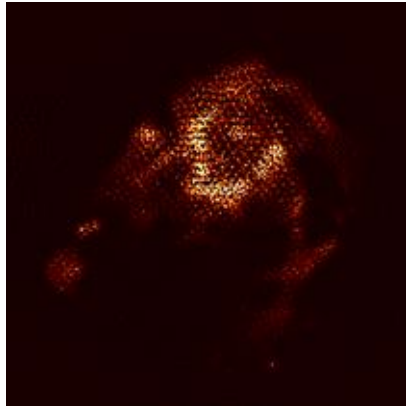


MEM

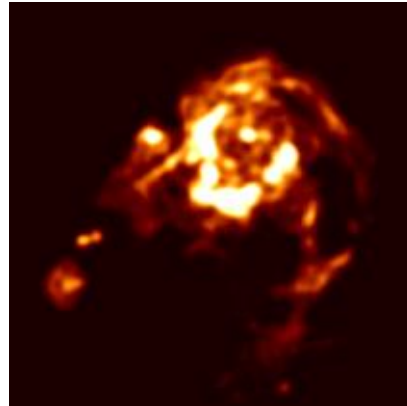


Multi-Scale

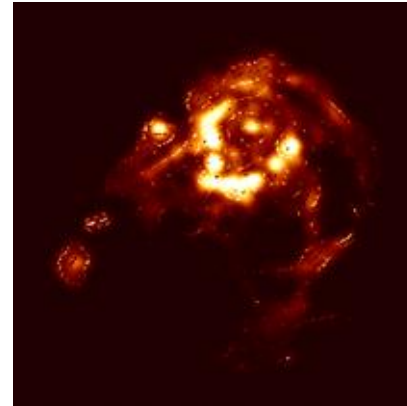


ASP

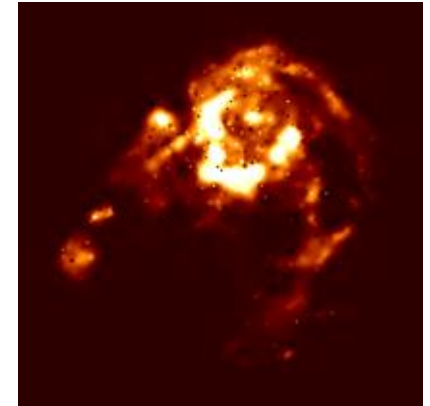


Model

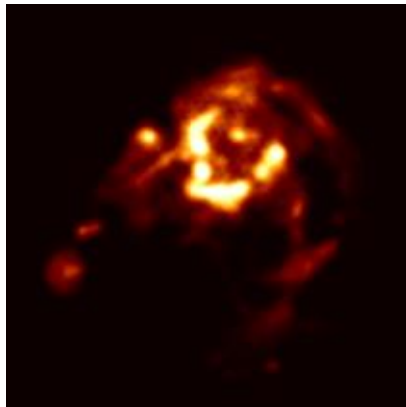

(Hogbom 1974, Clark 1980, Schwab & Cotton 1983 )

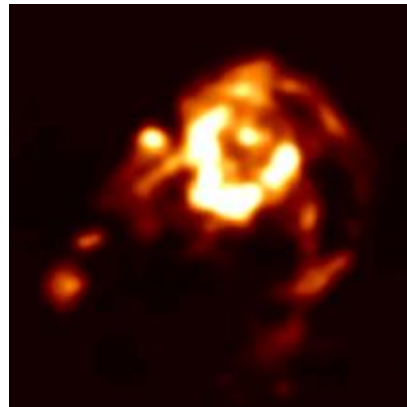


( Cornwell & Evans, 1985)

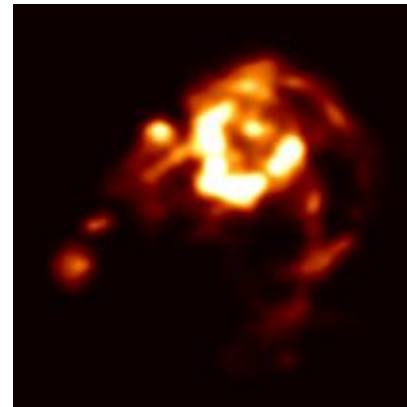

(Cornwell 2008)


Restored

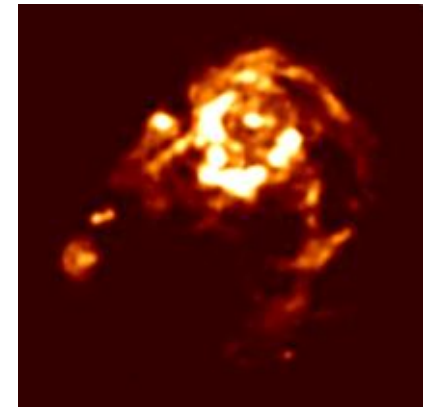

(Bhatnagar & Cornwell 2004)

(figures from S. Bhatnagar)

# Deconvolution

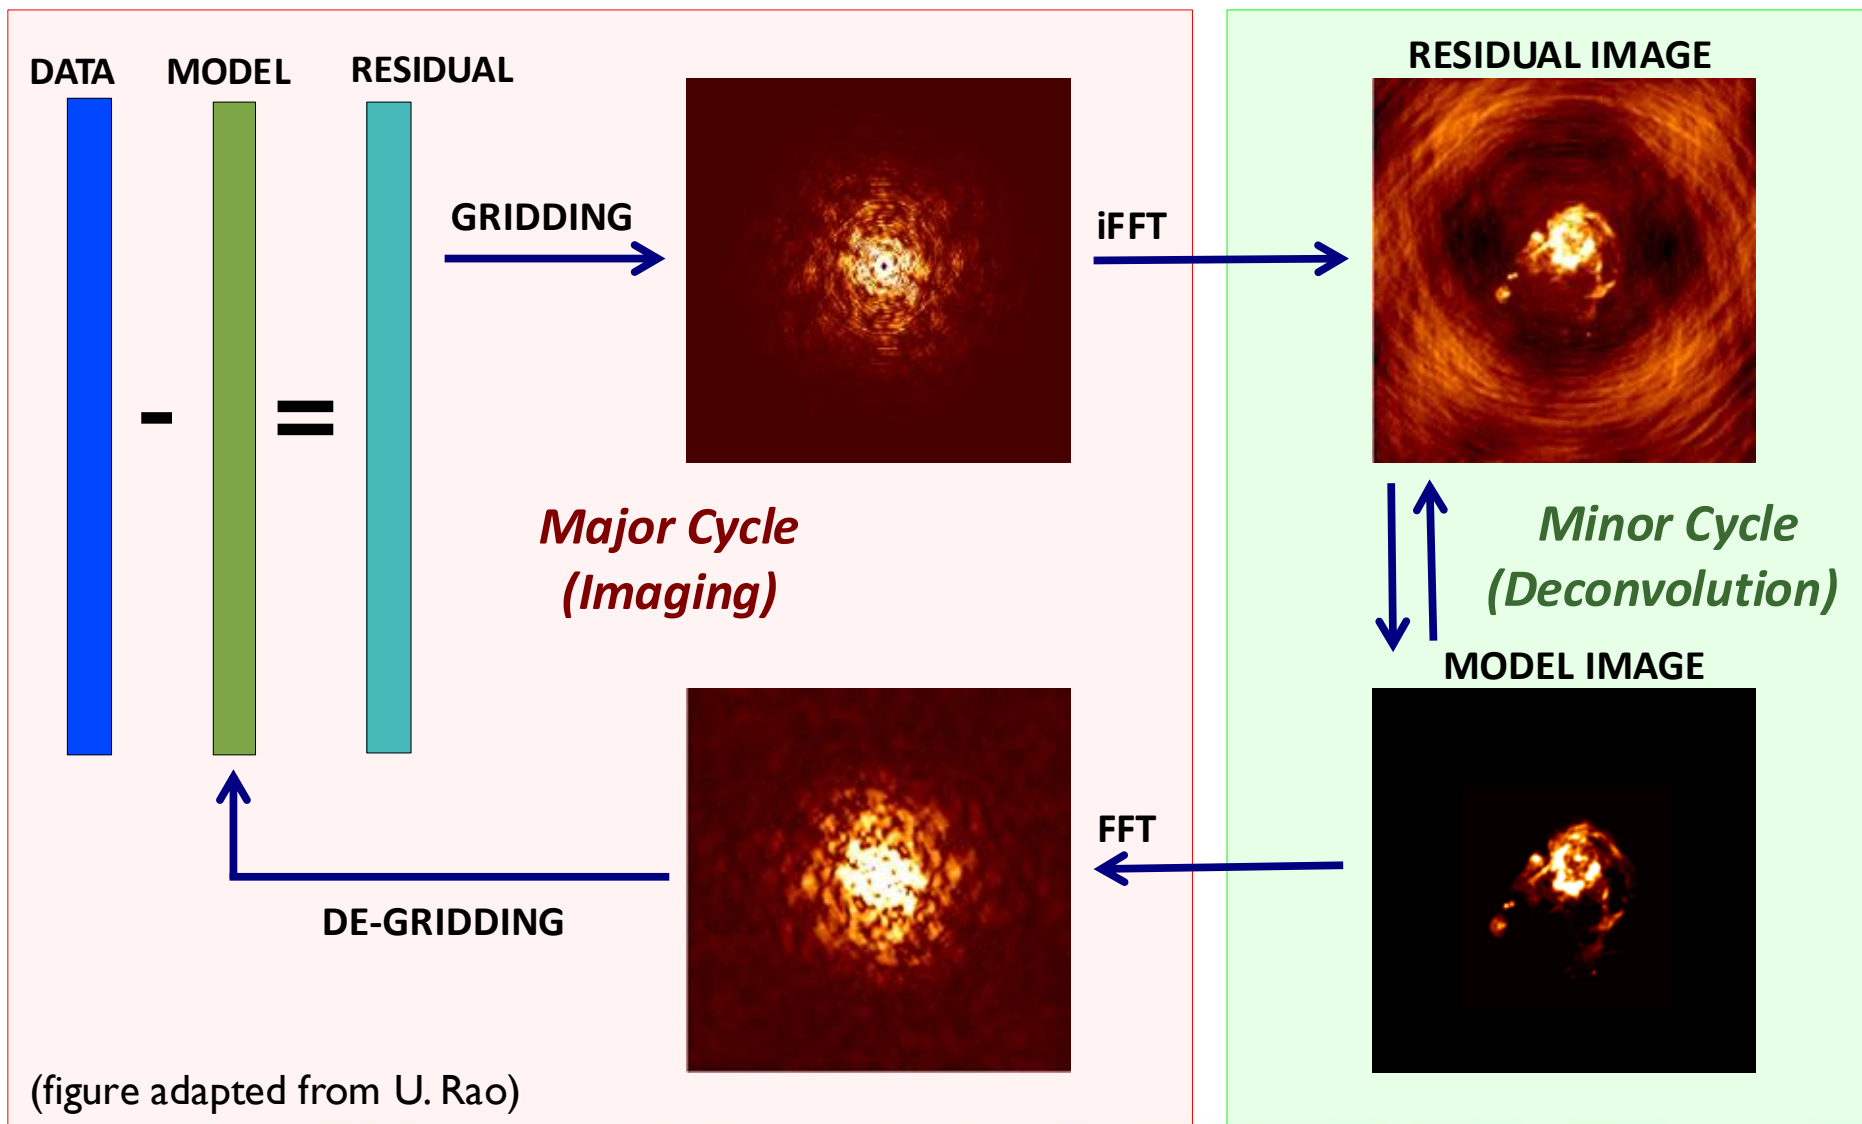

# Summary

**Visibility** – a measurement of one Fourier component of the sky brightness distribution, made in the  $u, v$  space



**Dirty image** – the inverse transform of the measured visibilities. Typically created by evaluating the visibilities on a regular grid, then using the Fast Fourier Transform.

**Point spread function** – what every point source looks like in the dirty image; also called the dirty beam. It is the FT of the gridded weights.

**Deconvolution** – replaces occurrences of the dirty beam in the dirty image by a Gaussian of equivalent size to make a '**cleaned**' image; this works by constructing a sky model in the image domain.

# Extend to multi- frequency


**Everything** up to here has described single-channel imaging  
What about when you have multiple frequencies?

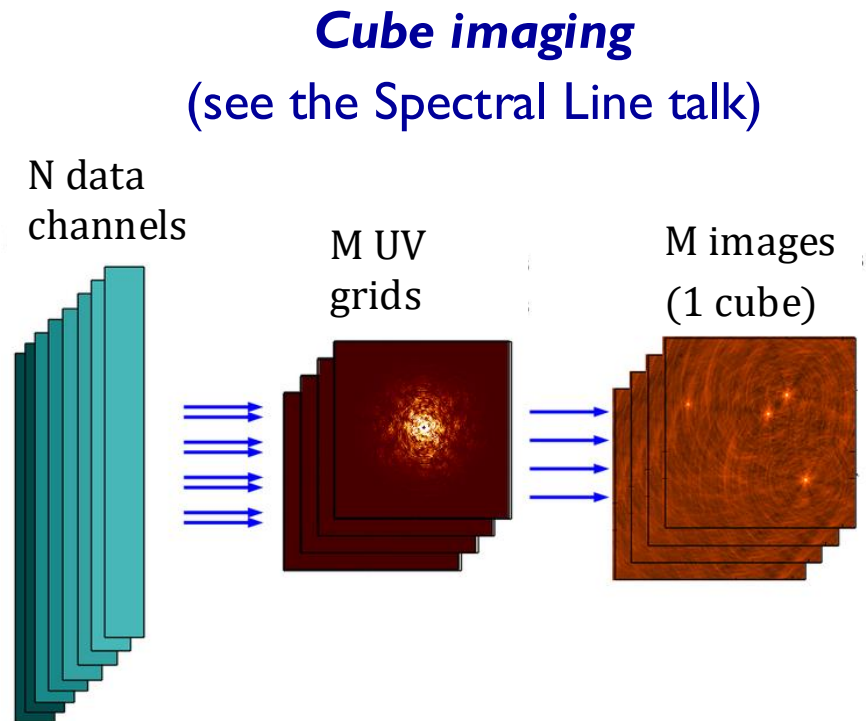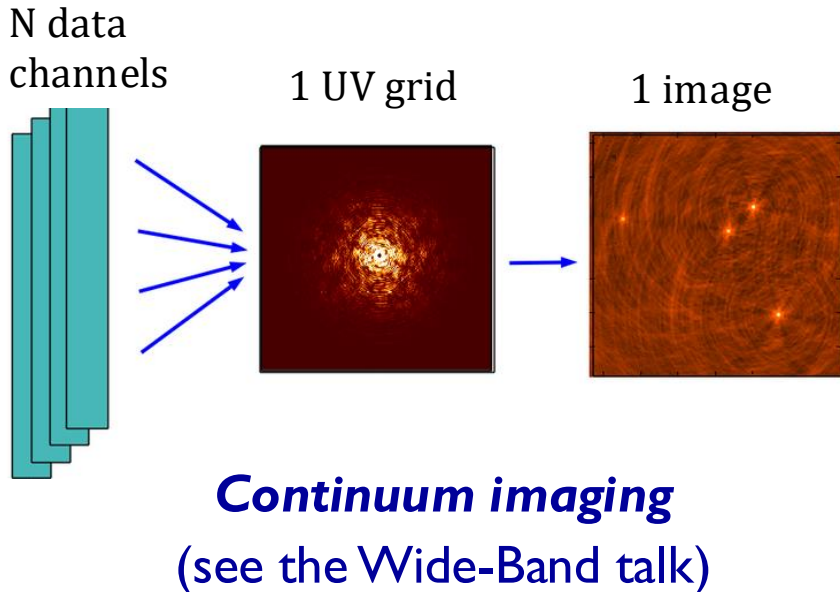

# Extend to multi- Stokes


What about when you have multiple polarizations / correlations ?

N data channels  
x4 correlations

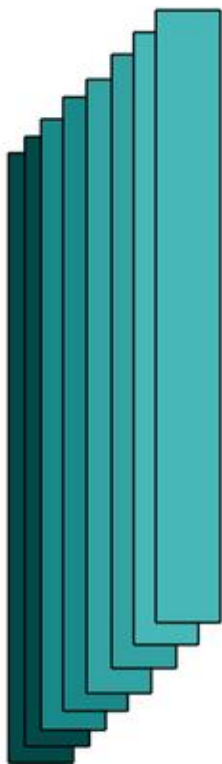


## *Polarization imaging*

Stokes IQUV grids

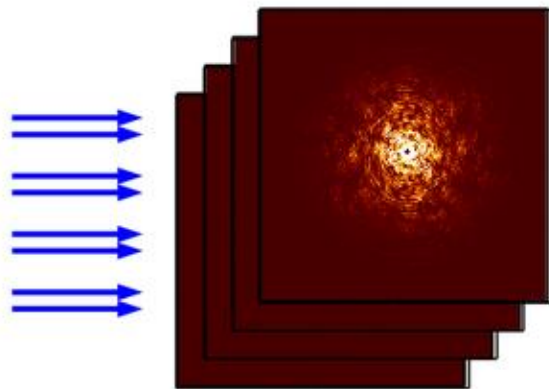

Stokes IQUV cube

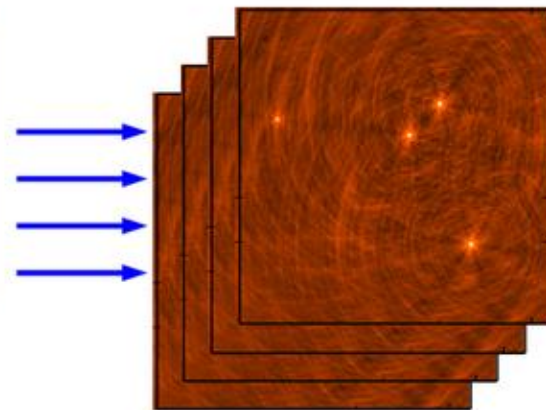


(see Polarization talk)


# Extend to multi-observation

What is you want to combine multiple observations?

What if the observations are from different telescopes, array configurations, or are from a single dish telescope?

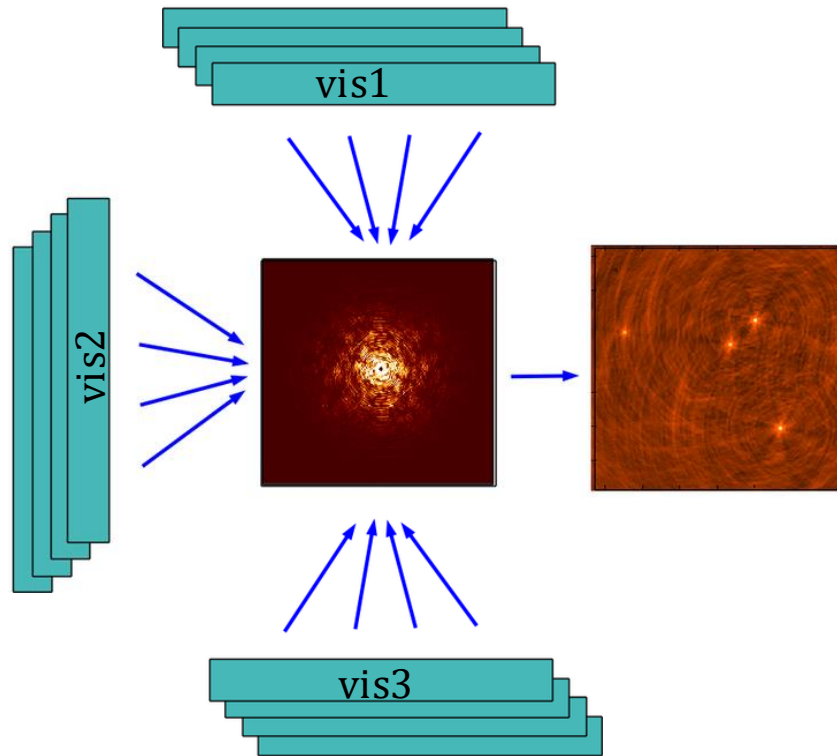

(also mosaicking; see Wide-field talk)

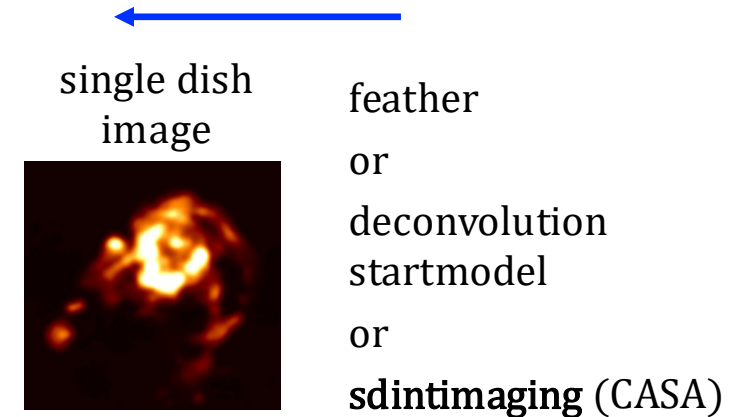

# References & Credits

- Interferometry and Synthesis in Radio Astronomy  
(Thompson, Moran, & Swenson)
- Synthesis Imaging in Radio Astronomy II  
(Editors: Taylor, Carilli, & Perley)
- Essential Radio Astronomy  
(Condon & Ransom)
- Tutorials, telescope observing guides, software documentation
- Imaging lectures from previous workshops



**[www.nrao.edu](http://www.nrao.edu)**  
**[science.nrao.edu](http://science.nrao.edu)**  
**[public.nrao.edu](http://public.nrao.edu)**

*The National Radio Astronomy Observatory is a facility of the National Science Foundation  
operated under cooperative agreement by Associated Universities, Inc.*