


Pressurization and Moisture Reduction



Procedure

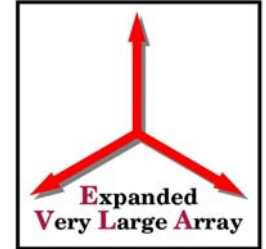


-
- Feeds are purged with dry nitrogen
 - Both ends are sealed
 - Installed on receiver
 - Attached to a dry air system (desiccant)



How it Works



- The feed is initially charged with dry nitrogen
- As temperature increase air is pushed through the desiccant
- As temperature decrease air is drawn in through the desiccant

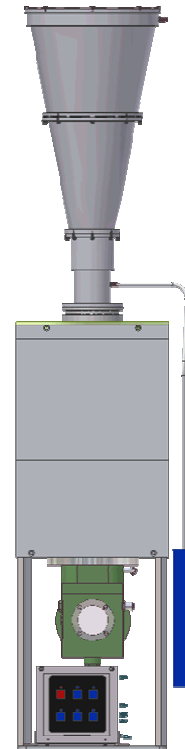



Questions?

